

Wiha bits.

Wiha makes it possible: Perfect technic for professional work.



Drive

| | Slotted | Phillips PH | Pozidriv PZ | TORX® | TORX® Tamper Resistant | TORX PLUS® | Hex | Square | Multi-tooth | Tri-Wing® + Torq-Set® | SIT + Spanner |
|---------------------------------|------------------|-------------|-----------------|-------------------|------------------------|------------|----------|----------|-------------|-----------------------|---------------|
| DuraBits | 113 | 113 | 113 | 113 | | | | | | | |
| Diamond torsion bits | 115 | 115 | 115 | 115 | | | | | | | |
| Torsion bits | 117-119 | 117-120 | 117-120 | 117-119 | | | | | | 120 | |
| Inkra bits | | 121 | 121 | | | | | | | | |
| Standard bits | 123, 128 | 123, 128 | 123, 128 | 124, 128-129 | 124, 130 | 124, 130 | 125, 131 | 126, 131 | 126 | | 126 |
| Bits with MagicRing® | | | | | | | 125, 131 | | | | |
| Threaded bits | | 132 | 132 | | | | | | | | |
| Bits for drive system C 4 | 134-135 | 134-135 | | 134-135 | | | 134-135 | | | | |
| Bits for drive system C 8 5/16" | 136 | 136 | 136 | 136 | | | 136 | | | | |
| Bits for drive system G 7 | | 136 | 136 | | | | | | | | |
| | Wood twist drill | Twist drill | Universal drill | Combination drill | Counter-sink | | | | | | |
| Drill bits | 138 | 138 | 139 | 139 | 139 | | | | | | |



Wiha stainless steel bits.
See stainless steel tool range, page 294 – 301

Bits range

Individual bits

Wiha drive system C 6.3 and E 6.3

Wiha DuraBit.

A diamond among bits..... 112 – 113

Wiha Diamond torsion bit.

Saves strength, time & money..... 114 – 115

Wiha Torsion bit.

Patented torsion zone for longer service life..... 116 – 120

Wiha Inkra bit.

The specialist for every angle..... 121

Wiha Standard bit.

Full programme range in outstanding quality..... 122 – 131

Wiha Xeno bits.

For terminal screws..... 127

Wiha threaded bit.

For optimised use in stationary screw systems..... 132

Wiha special bits.

Customised for your application..... 133

Wiha bits for drive system C 4..... 134 – 135

Wiha bits for drive system C 8 5/16"..... 136

Wiha bits for drive system G 7..... 136

Wiha CentroFix system. Quick and professional..... 137

Wiha CentroFix.
One for all..... 137 + 147

Wiha drill bits.
Just keep on working..... 138 – 139

Wiha nut driver product line.
The entire line for hand and machine use..... 140 – 143

Wiha adapters..... 144

Wiha impact screwdriver assortment..... 145

Wiha Gripper. Seizes everything..... 146

Bit holders

Wiha bit holder for power machines..... 148 – 149

Wiha offset screwdriver..... 149

Wiha bit holder with handle..... 150

Wiha magazine bit holder. Everything in the palm of your hand..... 151 – 152

Wiha magazine bit holder Stubby..... 153


Bit ranges

Wiha XSelector and XLSelector.
Couldn't be smaller!..... 154 – 161

Wiha Collector.
Everything in one box..... 162 – 163


Wiha bit cassette and bulk packs..... 164 – 165

Wiha SB bit programme.
Full programme range in outstanding quality..... 166 – 171

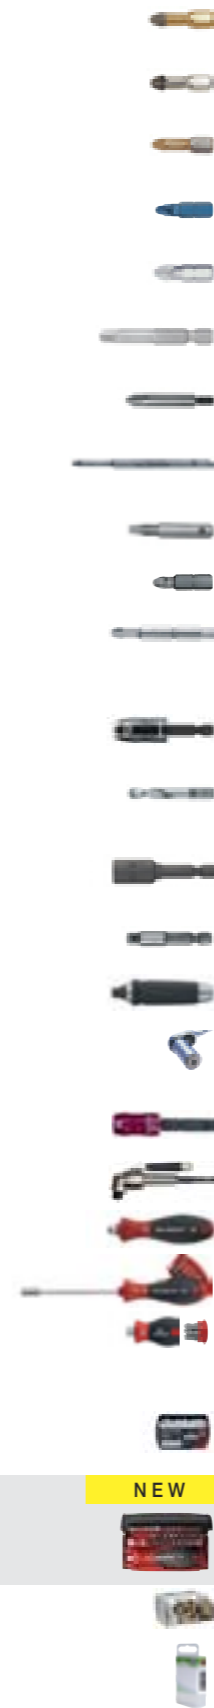

Available from
1. June 2010

NEW



Wiha DuraBit.

A diamond among bits.



The extremely wear-resistant hard-metal coating considerably increases tool life.


With DuraBit, Wiha puts its innovative strength to the test. The tough torsion bit has an extremely wear-resistant hard-metal coating that gains a secure hold in the screw head.

This revolutionary coating technology originates from the aerospace industry and guarantees outstanding gripping of the bit surface. The user quickly comes to appreciate the benefits: a longer tool life, much reduced cam-out effects and superior handling enable efficient work, even with the most difficult of applications.

The wolfram carbide particles are permanently applied to the bit tip – a breaking away of the particles (as occurs with conventional, diamond-coated bits) is therefore significantly reduced.



The Dura coating reduces CamOut effects to an unbeatable minimum – no more slipping out of the bit from the screw head.



Wolfram carbide particles.

Non-corroding nickel coating.

Long-lasting, durable wolfram carbide coating increases service life of the bit by many times when compared to a diamond-coated bit. The subjacent nickel coating ensures extra-long corrosion resistance.



Wiha DuraBit.

- Extremely wear-resistant hard-metal coating also used in the aerospace industry gains a secure hold in the screw head. Outstanding reduction of CamOut forces prevents slipping out of the bit
- Wolfram carbide particles guarantee a significantly greater service life when compared to conventional diamond-coated bits
- Nickel coating of the entire bit for extra-long corrosion resistance
- Clear reduction in the cam-out effect (slipping of the bit out of the screw head) for:
 - Fatigue-free work (less force required)
 - Less wear of bit and screw
 - Safe work on delicate surfaces
- Work with Wiha DuraBits featuring torsion zones reduces the amount of time for fastening and enables economic and safe work

Style C 6.3 (1/4").



7010 DR DuraBit with torsion zone, slotted, style C 6.3.

Material: High grade chrome-vanadium steel, through hardened.
 Geometry: Torsion zone for protecting against premature breakage of bits under load.
 Coating: Hard-metal coating, extremely wear-resistant.
 Drive: DIN 3126, ISO 1173, style C 6.3.
 Application: For effortless, safe working in demanding industrial applications and on delicate surfaces.
 Extra: Non-corroding nickel coating in combination with wolfram carbide particles. Extremely wear-resistant, hard-metal coated DuraBit tip gains a secure hold in the screw head and guarantees a significantly greater service life when compared to conventional diamond-coated bits. Outstanding reduction of CamOut forces prevents slipping out of the bit from the screw.

| Order-No. | Ø | — | ⊖ | — |
|-----------|-----|----|-----|----|
| 23104 0 | 4.5 | 25 | 0.6 | 10 |
| 23106 4 | 5.5 | 25 | 0.8 | 10 |
| 23110 1 | 6.5 | 25 | 1.2 | 10 |

Style C 6.3 and E 6.3 (1/4").



7015 DR DuraBit with torsion zone, TORX®, style C 6.3.

Material: High grade chrome-vanadium steel, through hardened.
 Geometry: Torsion zone for protecting against premature breakage of bits under load.
 Coating: Hard-metal coating, extremely wear-resistant.
 Drive: DIN 3126, ISO 1173, style C 6.3.
 Application: For effortless, safe working in demanding industrial applications and on delicate surfaces.
 Extra: Non-corroding nickel coating in combination with wolfram carbide particles. Extremely wear-resistant, hard-metal coated DuraBit tip gains a secure hold in the screw head and guarantees a significantly greater service life when compared to conventional diamond-coated bits. Outstanding reduction of CamOut forces prevents slipping out of the bit from the screw.

| Order-No. | ⊕ | — | — |
|-----------|-----|----|----|
| 23133 0 | T10 | 25 | 10 |
| 23135 4 | T15 | 25 | 10 |
| 23137 8 | T20 | 25 | 10 |
| 23139 2 | T25 | 25 | 10 |
| 23141 5 | T30 | 25 | 10 |
| 23143 9 | T40 | 25 | 10 |



7011 DR DuraBit with torsion zone, Phillips, style C 6.3.

Material: High grade chrome-vanadium steel, through hardened.
 Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
 Coating: Hard-metal coating, extremely wear-resistant.
 Drive: DIN 3126, ISO 1173, style C 6.3.
 Application: For effortless, safe working in demanding industrial applications and on delicate surfaces.
 Extra: Non-corroding nickel coating in combination with wolfram carbide particles. Extremely wear-resistant, hard-metal coated DuraBit tip gains a secure hold in the screw head and guarantees a significantly greater service life when compared to conventional diamond-coated bits. Outstanding reduction of CamOut forces prevents slipping out of the bit from the screw.

| Order-No. | ⊕ | — | — |
|-----------|-----|----|----|
| 23114 9 | PH1 | 25 | 10 |
| 23116 3 | PH2 | 25 | 10 |
| 23118 7 | PH3 | 25 | 10 |



7041 DR DuraBit with torsion zone, Phillips, style E 6.3.

Material: High grade chrome-vanadium steel, through hardened.
 Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
 Coating: Hard-metal coating, extremely wear-resistant.
 Drive: DIN 3126, ISO 1173, style E 6.3.
 Application: For effortless, safe working in demanding industrial applications and on delicate surfaces.
 Extra: Non-corroding nickel coating in combination with wolfram carbide particles. Extremely wear-resistant, hard-metal coated DuraBit tip gains a secure hold in the screw head and guarantees a significantly greater service life when compared to conventional diamond-coated bits. Outstanding reduction of CamOut forces prevents slipping out of the bit from the screw.

| Order-No. | ⊕ | — | — |
|-----------|-----|----|---|
| 23388 4 | PH1 | 50 | 5 |
| 23390 7 | PH2 | 50 | 5 |
| 23392 1 | PH3 | 50 | 5 |



7012 DR DuraBit with torsion zone, Pozidriv, style C 6.3.

Material: High grade chrome-vanadium steel, through hardened.
 Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
 Coating: Hard-metal coating, extremely wear-resistant.
 Drive: DIN 3126, ISO 1173, style C 6.3.
 Application: For effortless, safe working in demanding industrial applications and on delicate surfaces.
 Extra: Non-corroding nickel coating in combination with wolfram carbide particles. Extremely wear-resistant, hard-metal coated DuraBit tip gains a secure hold in the screw head and guarantees a significantly greater service life when compared to conventional diamond-coated bits. Outstanding reduction of CamOut forces prevents slipping out of the bit from the screw.

| Order-No. | ⊕ | — | — |
|-----------|-----|----|----|
| 23120 0 | PZ1 | 25 | 10 |
| 23122 4 | PZ2 | 25 | 10 |
| 23124 8 | PZ3 | 25 | 10 |



7042 DR DuraBit with torsion zone, Pozidriv, style E 6.3.

Material: High grade chrome-vanadium steel, through hardened.
 Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
 Coating: Hard-metal coating, extremely wear-resistant.
 Drive: DIN 3126, ISO 1173, style E 6.3.
 Application: For effortless, safe working in demanding industrial applications and on delicate surfaces.
 Extra: Non-corroding nickel coating in combination with wolfram carbide particles. Extremely wear-resistant, hard-metal coated DuraBit tip gains a secure hold in the screw head and guarantees a significantly greater service life when compared to conventional diamond-coated bits. Outstanding reduction of CamOut forces prevents slipping out of the bit from the screw.

| Order-No. | ⊕ | — | — |
|-----------|-----|----|---|
| 23394 5 | PZ1 | 50 | 5 |
| 23396 9 | PZ2 | 50 | 5 |
| 23398 3 | PZ3 | 50 | 5 |

Wiha Diamond torsion bit.

Saves strength, time & money.



Finest diamond particles and sapphire particles ensure a firm grip a thousand times over.

Diamond torsion bits supplement Wiha's range of high-quality special bits. In the area of mechanical fastening the significantly greater tool life means substantial cost reductions. The new Wiha diamond torsion bits are recognisable by their silver look and striking black tip and offer an impressively secure grip in the screw.



The Diamond torsion bit from Wiha scores on two accounts: it reduces the amount of pressure that has to be applied and increases the tool life.

The torsion zone protects against torque peaks.



Wiha Diamond torsion bit.

- Reduction of:
 - Pressure forces to be applied
 - Wear and tear of bit and screw head
 - The amount of time to turn the screw and thus reduction in the costs of screw applications
 - Cam-out effect
- Extended service life as a result of the improved torsion zone
- Nickel coating of the entire bit for extra-long corrosion resistance

Style C 6.3 (1/4").



7010 D Diamond torsion bit, slotted, style C 6.3.

Material: High grade chrome-vanadium steel, through hardened.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Coating: Extremely wear-resistant diamond-sapphire coating with a long service life.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For fatigue-free work; ideal bit for frequent working.
Extra: Non-corrosive coating.
 Diamond particles and sapphire particles for optimum torque transfer and a secure grip in the screw head.

| Order-No. | ⌀ | ↔ | ⊖ | ↔ |
|-----------|-----|----|-----|----|
| 21272 8 | 4.5 | 25 | 0.6 | 10 |
| 21216 2 | 5.5 | 25 | 0.8 | 10 |
| 21220 9 | 6.5 | 25 | 1.2 | 10 |

Style C 6.3 and E 6.3 (1/4").



7015 D Diamond torsion bit, TORX®, style C 6.3.

Material: High grade chrome-vanadium steel, through hardened.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Coating: Extremely wear-resistant diamond-sapphire coating with a long service life.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For fatigue-free work; ideal bit for frequent working.
Extra: Non-corrosive coating.
 Diamond particles and sapphire particles for optimum torque transfer and a secure grip in the screw head.

| Order-No. | ⊕ | ↔ | ↔ |
|-----------|-----|----|----|
| 21204 9 | T10 | 25 | 10 |
| 21206 3 | T15 | 25 | 10 |
| 21208 7 | T20 | 25 | 10 |
| 21210 0 | T25 | 25 | 10 |
| 21212 4 | T30 | 25 | 10 |
| 21214 8 | T40 | 25 | 10 |



7011 D Diamond torsion bit, Phillips, style C 6.3.

Material: High grade chrome-vanadium steel, through hardened.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Coating: Extremely wear-resistant diamond-sapphire coating with a long service life.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For fatigue-free work; ideal bit for frequent working.
Extra: Non-corrosive coating.
 Diamond particles and sapphire particles for optimum torque transfer and a secure grip in the screw head.

| Order-No. | ⊕ | ↔ | ↔ |
|-----------|-----|----|----|
| 21193 6 | PH1 | 25 | 10 |
| 21194 3 | PH2 | 25 | 10 |
| 21196 7 | PH3 | 25 | 10 |



7041 D Diamond torsion bit, Phillips, style E 6.3.

Material: High grade chrome-vanadium steel, through hardened.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Coating: Extremely wear-resistant diamond-sapphire coating with a long service life.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For fatigue-free work; ideal bit for frequent working.
Extra: Non-corrosive coating.
 Diamond particles and sapphire particles for optimum torque transfer and a secure grip in the screw head.

| Order-No. | ⊕ | ↔ | ↔ |
|-----------|-----|----|---|
| 23376 1 | PH1 | 50 | 5 |
| 23378 5 | PH2 | 50 | 5 |
| 23380 8 | PH3 | 50 | 5 |



7012 D Diamond torsion bit, Pozidriv, style C 6.3.

Material: High grade chrome-vanadium steel, through hardened.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Coating: Extremely wear-resistant diamond-sapphire coating with a long service life.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For fatigue-free work; ideal bit for frequent working.
Extra: Non-corrosive coating.
 Diamond particles and sapphire particles for optimum torque transfer and a secure grip in the screw head.

| Order-No. | ⊕ | ↔ | ↔ |
|-----------|-----|----|----|
| 21198 1 | PZ1 | 25 | 10 |
| 21200 1 | PZ2 | 25 | 10 |
| 21202 5 | PZ3 | 25 | 10 |




7042 D Diamond torsion bit, Pozidriv, style E 6.3.

Material: High grade chrome-vanadium steel, through hardened.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Coating: Extremely wear-resistant diamond-sapphire coating with a long service life.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For fatigue-free work; ideal bit for frequent working.
Extra: Non-corrosive coating.
 Diamond particles and sapphire particles for optimum torque transfer and a secure grip in the screw head.

| Order-No. | ⊕ | ↔ | ↔ |
|-----------|-----|----|---|
| 23382 2 | PZ1 | 50 | 5 |
| 23384 6 | PZ2 | 50 | 5 |
| 23386 0 | PZ3 | 50 | 5 |

Wiha Torsion bit.

Patented torsion zone for longer service life.

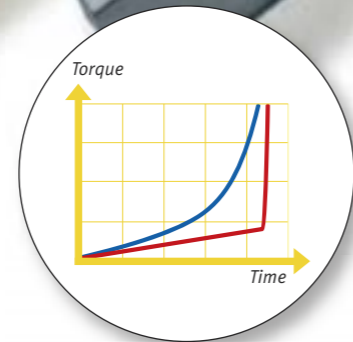

The red line indicates the steep increase in torque with hard applications, e.g. in metal.

The blue line shows a steady torque increase in soft applications, e.g. in wood working.



Wiha Torsion bit.

The main cause of wear with soft fastening applications such as in wood for example is the wear of the profile edges because the bit rattles through. A hard bit needs to be used here: Wiha HOT.

With hard fastening jobs such as hitting metal surfaces the main reason for wear is breakage of the bits. These usually occur with torque peaks near to the end of the fastening process. A tough-but-flexible bit is the answer: Wiha ZOT.

The special assortment of Wiha torsion bits with torsion zones offers optimal products for both soft and hard fastening tasks.

Wiha ZOT Torsion bits

- Tough, hard Torsion quality for **hard applications**
- Ideal for screw applications in metal and hard materials
- Elastic Torsion zone absorbs the strong torque peaks in the final phase of the application (red line)
- Highly resistant to wear and tear due to special heat treatment
- Hardness 61-2 HRC.
- For trade and DIY

Wiha HOT Torsion bits

- Extra hard Torsion quality for **soft applications**
- Ideal for screw applications in wood and soft materials
- Average requirements concerning elasticity are used to optimise performance and resistance to wear and tear (blue line)
- Hardness 63-2 HRC.
- For trade and DIY

Wiha TiN Torsions bits

- Tough, hard Torsion quality with very hard titanium-nitride (TiN) coating
- Optimum resistance to wear and tear due to very hard TiN coating
- Combines the advantages of Wiha HOT bits and ZOT bits in one outstanding bit
- For trade and DIY, especially for industry

Style C 6.3 (1/4").



7010 TiN TiN Torsion bit, slotted, style C 6.3.

Material: High grade chrome-vanadium steel, through hardened.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Coating: Titanium nitride for extended tool life.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: Particularly suitable for screws that require frequent working.

| Order-No. | ⌀ | → | ← | ← |
|-----------|-----|----|-----|----|
| 04743 6 | 4.5 | 25 | 0.6 | 10 |
| 04744 3 | 5.5 | 25 | 0.8 | 10 |
| 04745 0 | 6.5 | 25 | 1.2 | 10 |
| 04746 7 | 8.0 | 25 | 1.2 | 10 |



7011 TiN TiN Torsion bit, Phillips, style C 6.3.

Material: High grade chrome-vanadium steel, through hardened.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Coating: Titanium nitride for extended tool life.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: Particularly suitable for screws that require frequent working.

| Order-No. | ⊕ | → | ← | ← |
|-----------|-----|----|---|----|
| 04654 5 | PH1 | 25 | | 10 |
| 04655 2 | PH2 | 25 | | 10 |
| 04656 9 | PH3 | 25 | | 10 |



7012 TiN TiN Torsion bit, Pozidriv, style C 6.3.

| Order-No. | ⊕ | → | ← | ← |
|-----------|-----|----|---|----|
| 04657 6 | PZ1 | 25 | | 10 |
| 04658 3 | PZ2 | 25 | | 10 |
| 04659 0 | PZ3 | 25 | | 10 |



7015 TiN TiN Torsion bit, TORX®, style C 6.3.

| Order-No. | ⊗ | → | ← | ← |
|-----------|-----|----|---|----|
| 20964 3 | T6 | 25 | | 10 |
| 20966 7 | T7 | 25 | | 10 |
| 20968 1 | T8 | 25 | | 10 |
| 20970 4 | T9 | 25 | | 10 |
| 20972 8 | T10 | 25 | | 10 |
| 20974 2 | T15 | 25 | | 10 |
| 20976 6 | T20 | 25 | | 10 |
| 20978 0 | T25 | 25 | | 10 |
| 20980 3 | T27 | 25 | | 10 |
| 20982 7 | T30 | 25 | | 10 |
| 20984 1 | T40 | 25 | | 10 |

Style E 6.3 (1/4").



7041 TiN TiN Torsion bit, Phillips, style E 6.3.

Material: High grade chrome-vanadium steel, through hardened.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Coating: Titanium nitride for extended tool life.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: Particularly suitable for screws that require frequent working.

| Order-No. | ⊕ | → | ← | ← |
|-----------|-----|----|---|---|
| 04861 7 | PH1 | 50 | | 5 |
| 04862 4 | PH2 | 50 | | 5 |
| 04863 1 | PH3 | 50 | | 5 |



7042 TiN TiN Torsion bit, Pozidriv, style E 6.3.

Material: High grade chrome-vanadium steel, through hardened.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Coating: Titanium nitride for extended tool life.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: Particularly suitable for screws that require frequent working.

| Order-No. | ⊕ | → | ← | ← |
|-----------|-----|----|---|---|
| 04864 8 | PZ1 | 50 | | 5 |
| 04865 5 | PZ2 | 50 | | 5 |
| 04866 2 | PZ3 | 50 | | 5 |

Wiha Torsion bit.

Patented torsion zone for longer service life.

Style C 6.3 (1/4").



7010 HOT HOT Torsion bit, slotted, style C 6.3.

Material: High-grade chrome-vanadium steel, through-hardened, extra-hard.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: Particularly suitable for turning screws in wood and soft materials.

| Order-No. | Ø | → | ⇄ | ← |
|-----------|-----|----|-----|----|
| 05295 9 | 5.5 | 25 | 0.8 | 10 |
| 05296 6 | 6.5 | 25 | 1.2 | 10 |



7011 HOT HOT Torsion bit, Phillips, style C 6.3.

Material: High-grade chrome-vanadium steel, through-hardened, extra-hard.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.

| Order-No. | ⇄ | → | ← |
|-----------|-----|----|----|
| 04486 2 | PH1 | 25 | 10 |
| 04485 5 | PH2 | 25 | 10 |
| 04484 8 | PH3 | 25 | 10 |



7012 HOT HOT Torsion bit, Pozidriv, style C 6.3.

Material: High-grade chrome-vanadium steel, through-hardened, extra-hard.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.

| Order-No. | ⇄ | → | ← |
|-----------|-----|----|----|
| 04483 1 | PZ1 | 25 | 10 |
| 04482 4 | PZ2 | 25 | 10 |
| 04481 7 | PZ3 | 25 | 10 |



7015 HOT HOT Torsion bit, TORX®, style C 6.3.

Material: High-grade chrome-vanadium steel, through-hardened, extra-hard.
Geometry: Torsion zone for protecting against premature breakage of bits under load.

| Order-No. | ⇄ | → | ← |
|-----------|-----|----|----|
| 31815 4 | T10 | 25 | 10 |
| 31816 1 | T15 | 25 | 10 |
| 31817 8 | T20 | 25 | 10 |
| 31818 5 | T25 | 25 | 10 |
| 31819 2 | T30 | 25 | 10 |
| 31820 8 | T40 | 25 | 10 |

Style E 6.3 (1/4").



7041 HOT HOT Torsion bit, Phillips, style E 6.3.

Material: High-grade chrome-vanadium steel, through-hardened, extra-hard.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: Particularly suitable for turning screws in wood and soft materials.

| Order-No. | ⇄ | → | ← |
|-----------|-----|----|---|
| 04544 9 | PH1 | 50 | 5 |
| 04543 2 | PH2 | 50 | 5 |
| 04542 5 | PH3 | 50 | 5 |



7042 HOT HOT Torsion bit, Pozidriv, style E 6.3.

Material: High-grade chrome-vanadium steel, through-hardened, extra-hard.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: Particularly suitable for turning screws in wood and soft materials.

| Order-No. | ⇄ | → | ← |
|-----------|-----|----|---|
| 04550 0 | PZ1 | 50 | 5 |
| 04549 4 | PZ2 | 50 | 5 |
| 04548 7 | PZ3 | 50 | 5 |



7045 HOT HOT Torsion bit, TORX®, style E 6.3.

Material: High-grade chrome-vanadium steel, through-hardened, extra-hard.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: Particularly suitable for turning screws in wood and soft materials.

| Order-No. | ⇄ | → | ← |
|-----------|-----|----|---|
| 33666 0 | T10 | 50 | 5 |
| 33667 7 | T15 | 50 | 5 |
| 33668 4 | T20 | 50 | 5 |
| 33669 1 | T25 | 50 | 5 |
| 33670 7 | T30 | 50 | 5 |
| 33671 4 | T40 | 50 | 5 |

Style C 6.3 (1/4").



7010 ZOT ZOT Torsion bit, slotted, style C 6.3.

Material: High-quality chrome-vanadium steel, through-hardened, hard but elastic.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: Particularly suitable for turning screws in metal and hard materials.

| Order-No. | Ø | → | ⇄ | ← |
|-----------|-----|----|-----|----|
| 05288 1 | 4.5 | 25 | 0.6 | 10 |
| 05289 8 | 5.5 | 25 | 0.8 | 10 |
| 05290 4 | 5.5 | 25 | 1.0 | 10 |
| 05292 8 | 6.5 | 25 | 1.2 | 10 |
| 05293 5 | 8.0 | 25 | 1.2 | 10 |



7011 ZOT ZOT Torsion bit, Phillips, style C 6.3.

Material: High-quality chrome-vanadium steel, through-hardened, hard but elastic.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: Particularly suitable for turning screws in metal and hard materials.

| Order-No. | ⇄ | → | ← |
|-----------|-----|----|----|
| 05299 7 | PH1 | 25 | 10 |
| 05076 4 | PH2 | 25 | 10 |
| 05077 1 | PH3 | 25 | 10 |



7011 ZOT L ZOT Torsion bit, Phillips, style C 6.3.

| Order-No. | ⇄ | → | ← |
|-----------|-----|----|----|
| 04699 6 | PH1 | 50 | 10 |
| 04697 2 | PH2 | 50 | 10 |
| 04695 8 | PH3 | 50 | 10 |



7011 ACR ACR® Torsion bit, Phillips, style C 6.3.

Material: High grade chrome-vanadium steel, through hardened.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Drive: DIN 3126, ISO 1173, style C 6.3.
Extra: Anti-Cam-Out ribs ensure a secure grip in the screw and good force transfer.

| Order-No. | ⇄ | → | ← |
|-----------|-----|----|----|
| 04919 5 | PH1 | 25 | 10 |
| 04920 1 | PH2 | 25 | 10 |
| 04921 8 | PH3 | 25 | 10 |

Style C 6.3 (1/4").



7012 ZOT ZOT Torsion bit, Pozidriv, style C 6.3.

Material: High-quality chrome-vanadium steel, through-hardened, hard but elastic.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: Particularly suitable for turning screws in metal and hard materials.

| Order-No. | ⇄ | → | ← |
|-----------|-----|----|----|
| 05074 0 | PZ1 | 25 | 10 |
| 05075 7 | PZ2 | 25 | 10 |
| 05069 6 | PZ3 | 25 | 10 |



7012 ZOT L ZOT Torsion bit, Pozidriv, style C 6.3.

| Order-No. | ⇄ | → | ← |
|-----------|-----|----|----|
| 04693 4 | PZ1 | 50 | 10 |
| 04691 0 | PZ2 | 50 | 10 |
| 04689 7 | PZ3 | 50 | 10 |



7012 ACR ACR® Torsion bit, Pozidriv, style C 6.3.

Material: High grade chrome-vanadium steel, through hardened.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Drive: DIN 3126, ISO 1173, style C 6.3.
Extra: Anti-Cam-Out ribs ensure a secure grip in the screw and good force transfer.

| Order-No. | ⇄ | → | ← |
|-----------|-----|----|----|
| 04922 5 | PZ1 | 25 | 10 |
| 04923 2 | PZ2 | 25 | 10 |
| 04924 9 | PZ3 | 25 | 10 |



7015 ZOT ZOT Torsion bit, TORX®, style C 6.3.

| Order-No. | ⇄ | → | ← |
|-----------|-----|----|----|
| 20940 7 | T6 | 25 | 10 |
| 20942 1 | T7 | 25 | 10 |
| 20945 2 | T8 | 25 | 10 |
| 20946 9 | T9 | 25 | 10 |
| 20948 3 | T10 | 25 | 10 |
| 20950 6 | T15 | 25 | 10 |
| 20952 0 | T20 | 25 | 10 |
| 20954 4 | T25 | 25 | 10 |
| 20956 8 | T27 | 25 | 10 |
| 20958 2 | T30 | 25 | 10 |
| 20960 5 | T40 | 25 | 10 |

Wiha Torsion bit.

Patented torsion zone for longer service life.

Style C 6.3 and E 6.3 (1/4").



7019 ZOT TW ZOT Torsion bit, Tri-Wing®, style C 6.3.

Material: High-quality chrome-vanadium steel, through-hardened, hard but elastic.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For Tri-Wing® security screws.

| Order-No. | ⊕ | ↔ | ▬ |
|-----------|---|----|----|
| 22603 9 | 0 | 25 | 10 |
| 22604 6 | 1 | 25 | 10 |
| 22605 3 | 2 | 25 | 10 |
| 22606 0 | 3 | 25 | 10 |
| 22607 7 | 4 | 25 | 10 |
| 22608 4 | 5 | 25 | 10 |



7019 ZOT TS ZOT Torsion bit, Torq-Set®, style C 6.3.

Material: High-quality chrome-vanadium steel, through-hardened, hard but elastic.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For Torq-Set® security screws.

| Order-No. | ⊕ | ↔ | ▬ |
|-----------|-----|----|----|
| 27030 8 | 0 | 25 | 10 |
| 27028 5 | 1 | 25 | 10 |
| 26249 5 | 2 | 25 | 10 |
| 26045 3 | 3 | 25 | 10 |
| 22591 9 | 4 | 25 | 10 |
| 22592 6 | 5 | 25 | 10 |
| 22593 3 | 6 | 25 | 10 |
| 22594 0 | 8 | 25 | 10 |
| 22595 7 | 10 | 25 | 10 |
| 25572 5 | 1/4 | 32 | 10 |



7041 ZOT ZOT Torsion bit, Phillips, style E 6.3.

Material: High-quality chrome-vanadium steel, through-hardened, hard but elastic.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: Particularly suitable for turning screws in metal and hard materials.

| Order-No. | ⊕ | ↔ | ▬ |
|-----------|-----|----|---|
| 04541 8 | PH1 | 50 | 5 |
| 04540 1 | PH2 | 50 | 5 |
| 04539 5 | PH3 | 50 | 5 |

Style E 6.3 (1/4").



7042 ZOT ZOT Torsion bit, Pozidriv, style E 6.3.

Material: High-quality chrome-vanadium steel, through-hardened, hard but elastic.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: Particularly suitable for turning screws in metal and hard materials.

| Order-No. | ⊕ | ↔ | ▬ |
|-----------|-----|----|---|
| 04547 0 | PZ1 | 50 | 5 |
| 04546 3 | PZ2 | 50 | 5 |
| 04545 6 | PZ3 | 50 | 5 |



7049 ZOT TW ZOT Torsion bit, Tri-Wing®, style E 6.3.

Material: High-quality chrome-vanadium steel, through-hardened, hard but elastic.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For Tri-Wing® security screws.
Extra: 90 mm bits with long spiralled torsion zone.

| Order-No. | ⊕ | ↔ | ▬ |
|-----------|---|----|---|
| 22609 1 | 3 | 50 | 5 |
| 33695 0 | 3 | 90 | 5 |
| 22610 7 | 4 | 50 | 5 |
| 33696 7 | 4 | 90 | 5 |
| 22611 4 | 5 | 50 | 5 |
| 33697 4 | 5 | 90 | 5 |
| 22612 1 | 6 | 50 | 5 |
| 33698 1 | 6 | 90 | 5 |



7049 ZOT TS ZOT Torsion bit, Torq-Set®, style E 6.3.

Material: High-quality chrome-vanadium steel, through-hardened, hard but elastic.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For Torq-Set® security screws.
Extra: 90 mm bits with long spiralled torsion zone.

| Order-No. | ⊕ | ↔ | ▬ |
|-----------|----|----|---|
| 22596 4 | 4 | 50 | 5 |
| 33699 8 | 4 | 90 | 5 |
| 22597 1 | 5 | 50 | 5 |
| 33700 1 | 5 | 90 | 5 |
| 22598 8 | 6 | 50 | 5 |
| 33701 8 | 6 | 90 | 5 |
| 22599 5 | 8 | 50 | 5 |
| 33702 5 | 8 | 90 | 5 |
| 22600 8 | 10 | 50 | 5 |

Wiha Inkra bit.


The specialist for every angle.



The innovation for wood screws.

With the Inkra bit, Wiha has developed a revolutionary product for dry applications.

In practice, it is impossible to avoid working with an inclined bit axis. It is in such applications that the Inkra bit comes into its own. With its specially developed shape, the penetration depth in the screw head remains nearly constant, even in an inclined position.



Optimum torque transmission and a reduced cam-out effect are the resulting advantages.

Craftsmen value this bit because it makes their work much easier than using a standard bit.



User comfort and reduced pressure forces even in inclined positions.

Slippage and rounding of the bit tip are a thing of the past.

Wiha Inkra bit.

- Even when the drill is at an inclined position, the penetration depth in the screw head remains virtually constant
- No slipping and rounding of the bit tip and screw head
- Especially long service life
- The ideal bit for carpenters, joiners and craftsmen

Style C 6.3 (1/4").



7011 Inkra Inkra bit, Phillips, style C 6.3.

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: The ideal bit for areas that are difficult to access, particularly suitable for wood screws.
Extra: Non-corrosive coating.
Turning screws is easy, even if screwdriver is at an angle.

| Order-No. | ⊕ | ↔ | ▬ |
|-----------|-----|----|----|
| 21228 5 | PH1 | 25 | 10 |
| 20834 9 | PH2 | 25 | 10 |
| 21229 2 | PH3 | 25 | 10 |



7012 Inkra Inkra bit, Pozidriv, style C 6.3.

| Order-No. | ⊕ | ↔ | ▬ |
|-----------|-----|----|----|
| 21231 5 | PZ1 | 25 | 10 |
| 08461 5 | PZ2 | 25 | 10 |
| 21233 9 | PZ3 | 25 | 10 |

Style E 6.3 (1/4").



7041 Inkra Inkra bit, Phillips, style E 6.3.

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: The ideal bit for areas that are difficult to access, particularly suitable for wood screws.
Extra: Non-corrosive coating.
Turning screws is easy, even if screwdriver is at an angle.

| Order-No. | ⊕ | ↔ | ▬ |
|-----------|-----|----|---|
| 32499 5 | PH1 | 50 | 5 |
| 32500 8 | PH2 | 50 | 5 |
| 32501 5 | PH3 | 50 | 5 |



7042 Inkra Inkra bit, Pozidriv, style E 6.3.

| Order-No. | ⊕ | ↔ | ▬ |
|-----------|-----|----|---|
| 32502 2 | PZ1 | 50 | 5 |
| 32503 9 | PZ2 | 50 | 5 |
| 32504 6 | PZ3 | 50 | 5 |

Wiha Standard bit.

Full programme range in outstanding quality.



The Wiha Standard bits offer impressive quality and they are available in a versatile range.

The bits are subject to processor-aided manufacture as well as processor controlled heat treatment. Wiha thus guarantees a uniformly high product quality.



The high-quality basic material permits torque values that are far beyond the DIN standards:

- DIN 5261 for PH/PZ-bits
- DIN 5263 for slotted bits
- Camcar standards for TORX® and TORX PLUS® bits

This results in a long tool life at high torque values; this is the ideal prerequisite for standard applications.

Wiha Standard bits are the ideal multi-purpose tool to meet high requirements in terms of both quality and performance.



Wiha Standard bit.

- Robust and powerful allrounder bits for trade, industry and DIY
- Suitable for all applications. Thanks to its hardness values of HRC 59-61, it can be used for both manual and machine applications
- Highly resistant to wear and tear for a long tool life
- Optimum fitting in DIN screws for low wear and tear as well as optimum torque transmission
- Production based on industrial quality criteria according to the valid ISO standards with uniformly high product quality

Style C 6.3 (1/4").



7010 Z Standard bit, slotted, style C 6.3.

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry.

| Order-No. | Ø | → | ← | ← |
|-----------|-----|----|-----|----|
| 01623 4 | 4.5 | 25 | 0.6 | 10 |
| 01624 1 | 5.5 | 25 | 0.8 | 10 |
| 01626 5 | 6.5 | 25 | 1.2 | 10 |
| 01627 2 | 8.0 | 25 | 1.6 | 10 |

Style C 6.3 (1/4").



7011 Z Standard bit, Phillips, style C 6.3.

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry.

| Order-No. | ⊕ | → | ← |
|-----------|-----|----|----|
| 05298 0 | PH0 | 25 | 10 |
| 01657 9 | PH1 | 25 | 10 |
| 01658 6 | PH2 | 25 | 10 |
| 01659 3 | PH3 | 25 | 10 |
| 01649 4 | PH4 | 32 | 10 |



7010 ZL Standard bit, slotted, style C 6.3.

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry.

| Order-No. | Ø | → | ← | ← |
|-----------|-----|----|-----|----|
| 01604 3 | 3.0 | 39 | 0.5 | 10 |
| 01607 4 | 3.5 | 39 | 0.6 | 10 |
| 01606 7 | 4.0 | 39 | 0.5 | 10 |
| 01610 4 | 4.0 | 39 | 0.8 | 10 |
| 01609 8 | 4.5 | 39 | 0.6 | 10 |
| 01612 8 | 5.5 | 39 | 0.8 | 10 |
| 01613 5 | 5.5 | 39 | 1.0 | 10 |
| 01617 3 | 6.5 | 39 | 1.2 | 10 |
| 01619 7 | 8.0 | 39 | 1.2 | 10 |
| 01621 0 | 8.0 | 39 | 1.6 | 10 |



7012 Z Standard bit, Pozidriv, style C 6.3.

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry.

| Order-No. | ⊕ | → | ← |
|-----------|-----|----|----|
| 05300 0 | PZ0 | 25 | 10 |
| 01688 3 | PZ1 | 25 | 10 |
| 01689 0 | PZ2 | 25 | 10 |
| 01690 6 | PZ3 | 25 | 10 |
| 01681 4 | PZ4 | 32 | 10 |

Wiha Standard bit.

Full programme range in outstanding quality.

Style C 6.3 (1/4").



7015 Z Standard bit, TORX®, style C 6.3.

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry.

| Order-No. | Drive | Length | Quantity |
|-----------|-------|--------|----------|
| 26250 1 | T3 | 25 | 10 |
| 25097 0 | T4 | 25 | 10 |
| 01711 8 | T5 | 25 | 10 |
| 01712 5 | T6 | 25 | 10 |
| 01713 2 | T7 | 25 | 10 |
| 01714 9 | T8 | 25 | 10 |
| 01715 6 | T9 | 25 | 10 |
| 01716 3 | T10 | 25 | 10 |
| 01717 0 | T15 | 25 | 10 |
| 01718 7 | T20 | 25 | 10 |
| 01719 4 | T25 | 25 | 10 |
| 01720 0 | T27 | 25 | 10 |
| 01721 7 | T30 | 25 | 10 |
| 01722 4 | T40 | 25 | 10 |
| 01723 1 | T45 | 35 | 10 |
| 01724 8 | T50 | 35 | 10 |



7015K Z Standard bit, TORX® conic, style C 6.3.

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry.
Extra: Conical shape for a perfect clamping of the screw.

| Order-No. | Drive | Length | Quantity |
|-----------|-------|--------|----------|
| 04925 6 | T10 | 25 | 10 |
| 04926 3 | T15 | 25 | 10 |
| 04927 0 | T20 | 25 | 10 |
| 04928 7 | T25 | 25 | 10 |
| 04929 4 | T27 | 25 | 10 |
| 04930 0 | T30 | 25 | 10 |
| 04931 7 | T40 | 25 | 10 |



7015 Z TR Standard bit, TORX® H, style C 6.3.

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry.
Extra: Hole in the bit tip for TORX® Tamper Resistant security screws.

| Order-No. | Drive | Length | Quantity |
|-----------|-------|--------|----------|
| 03115 2 | T7H | 25 | 10 |
| 03117 6 | T8H | 25 | 10 |
| 01726 2 | T9H | 25 | 10 |
| 01727 9 | T10H | 25 | 10 |
| 01728 6 | T15H | 25 | 10 |
| 01729 3 | T20H | 25 | 10 |
| 01730 9 | T25H | 25 | 10 |
| 01731 6 | T27H | 25 | 10 |
| 01732 3 | T30H | 25 | 10 |
| 01733 0 | T40H | 25 | 10 |

Style C 6.3 (1/4").



7016 Z Standard bit, TORX PLUS®, style C 6.3.

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry.
Extra: Reinforced profile cross-section transfers approx. 25% more torque than with a TORX® profile.

| Order-No. | Drive | Length | Quantity |
|-----------|-------|--------|----------|
| 25994 5 | 3IP | 25 | NEW 10 |
| 25996 9 | 4IP | 25 | 10 |
| 25998 3 | 5IP | 25 | 10 |
| 23173 6 | 6IP | 25 | 10 |
| 23175 0 | 7IP | 25 | 10 |
| 23177 4 | 8IP | 25 | 10 |
| 23179 8 | 9IP | 25 | 10 |
| 23181 1 | 10IP | 25 | 10 |
| 23183 5 | 15IP | 25 | 10 |
| 23185 9 | 20IP | 25 | 10 |
| 23187 3 | 25IP | 25 | 10 |
| 23189 7 | 27IP | 25 | 10 |
| 23191 0 | 30IP | 25 | 10 |
| 23193 4 | 40IP | 25 | 10 |



7016 Z IPR Standard bit, TORX PLUS® Security, style C 6.3.

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry.
Attention: Security profile - sold only to authorised customers. Written proof of authorisation must be received.

| Order-No. | Drive | Length | Quantity |
|-----------|-------|--------|----------|
| 26346 1 | 10IPR | 25 | 10 |
| 26347 8 | 15IPR | 25 | 10 |
| 26348 5 | 20IPR | 25 | 10 |
| 26349 2 | 25IPR | 25 | 10 |
| 26350 8 | 30IPR | 25 | 10 |
| 26351 5 | 40IPR | 35 | 10 |

Style C 6.3 (1/4").



7013 Z Standard bit, hex, style C 6.3.

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry.

| Order-No. | Drive | Length | Quantity |
|-----------|-------|--------|----------|
| 04011 6 | 1.5 | 25 | 10 |
| 01703 3 | 2.0 | 25 | 10 |
| 01704 0 | 2.5 | 25 | 10 |
| 01705 7 | 3.0 | 25 | 10 |
| 01706 4 | 4.0 | 25 | 10 |
| 01707 1 | 5.0 | 25 | 10 |
| 01708 8 | 6.0 | 25 | 10 |
| 01709 5 | 8.0 | 25 | 10 |
| 01710 1 | 10.0 | 25 | 10 |



7013R Z Standard bit, hex, style C 6.3.

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry. Insert screws into or remove from boreholes, especially in difficult to access areas.
Extra: MagicRing® made from spring steel holds all standard screws in every position.

| Order-No. | Drive | Length | Quantity |
|-----------|-------|--------|----------|
| 22955 9 | 3.0 | 25 | 10 |
| 22956 6 | 4.0 | 25 | 10 |
| 22957 3 | 5.0 | 25 | 10 |
| 22958 0 | 6.0 | 25 | 10 |



7013 Z TR Standard bit, hex Tamper Resistant, style C 6.3.

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry.
Extra: Hole in the tip of the bit for hex Tamper Resistant security screws.

| Order-No. | Drive | Length | Quantity |
|-----------|-------|--------|----------|
| 25560 2 | TR2.0 | 25 | 10 |
| 25561 9 | TR2.5 | 25 | 10 |
| 25562 6 | TR3.0 | 25 | 10 |
| 25563 3 | TR4.0 | 25 | 10 |
| 25564 0 | TR5.0 | 25 | 10 |

Style C 6.3 (1/4").



7017 Z Standard bit, ball end hex, style C 6.3.

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry. Especially for screws that are difficult to access.
Extra: The ball end enables the user to work at angles up to 25°.

| Order-No. | Drive | Length | Quantity |
|-----------|-------|--------|----------|
| 01734 7 | 1.5 | 38 | 10 |
| 01735 4 | 2.0 | 38 | 10 |
| 01736 1 | 2.5 | 38 | 10 |
| 01737 8 | 3.0 | 38 | 10 |
| 01738 5 | 4.0 | 38 | 10 |
| 01739 2 | 5.0 | 38 | 10 |
| 01740 8 | 6.0 | 38 | 10 |



7017R Z Standard bit, ball end hex, style C 6.3.

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 6.3.
Application: For all types of screw applications in trade and industry. Insert screws into or remove from boreholes, especially in difficult to access areas.
Extra: MagicRing® made from spring steel holds all standard screws in every position. Ball end allows a working angle up to 25°.

| Order-No. | Drive | Length | Quantity |
|-----------|-------|--------|----------|
| 22959 7 | 3.0 | 38 | 10 |
| 22960 3 | 4.0 | 38 | 10 |
| 22961 0 | 5.0 | 38 | 10 |
| 22962 7 | 6.0 | 38 | 10 |

Wiha Standard bit.

Full programme range in outstanding quality.

Style C 6.3 (1/4").



7018 Z Standard bit, Robertson, style C 6.3.
 Material: High grade chrome-vanadium steel, through hardened.
 Drive: DIN 3126, ISO 1173, style C 6.3.
 Application: For all types of screw applications in trade and industry.
 Extra: A tapered tip allows for easy insertion of the bit into the screw.

| Order-No. | ⌀ | ↔ | ↔ |
|-----------|---|----|---|
| 06634 5 | 1 | 25 | 5 |
| 06635 2 | 2 | 25 | 5 |
| 06636 9 | 3 | 25 | 5 |

Style C 6.3 (1/4").



7019 Z SP Standard bit, spanner, style C 6.3.
 Material: High grade chrome-vanadium steel, through hardened.
 Drive: DIN 3126, ISO 1173, style C 6.3.
 Application: For security screws - snake eye.

| Order-No. | ⌀ | ↔ | ↔ |
|-----------|----|----|----|
| 27064 3 | 4 | 25 | 10 |
| 27065 0 | 6 | 25 | 10 |
| 27066 7 | 8 | 25 | 10 |
| 27067 4 | 10 | 25 | 10 |



7019 Z XZN Standard bit, multi-tooth, style C 6.3.
 Material: High grade chrome-vanadium steel, through hardened.
 Drive: DIN 3126, ISO 1173, style C 6.3.
 Application: For use in automotive applications.

| Order-No. | ⌀ | ↔ | ↔ |
|-----------|----|----|----|
| 26352 2 | M3 | 25 | 10 |
| 26353 9 | M4 | 25 | 10 |
| 26354 6 | M5 | 25 | 10 |
| 26355 3 | M6 | 25 | 10 |
| 26356 0 | M8 | 35 | 10 |



7019 Z SIT Standard bit, SIT, style C 6.3.
 Material: High grade chrome-vanadium steel, through hardened.
 Drive: DIN 3126, ISO 1173, style C 6.3.
 Application: For ASSY® and Plas screws.
 Extra: With colour-coding.

| Order-No. | ⌀ | ↔ | ↔ | Color |
|-----------|--------|----|---|------------|
| 27256 2 | SIT 10 | 25 | | pink |
| 27257 9 | SIT 20 | 25 | | orange |
| 27258 6 | SIT 25 | 25 | | green |
| 27259 3 | SIT 30 | 25 | | yellow |
| 27260 9 | SIT 40 | 25 | | light pink |

Wiha Info



Colour-coding of SIT bits:

| | | |
|--|------------|----------|
| | pink | = SIT 10 |
| | orange | = SIT 20 |
| | green | = SIT 25 |
| | yellow | = SIT 30 |
| | light pink | = SIT 40 |

Wiha Xeno bits.

For terminal screws.



Wiha's new bits for terminal screws.



The Wiha Xeno bit is a special bit used for fastening and unfastening terminal screws. These screws are typically used with switch cabinet systems and fuse boxes, terminal blocks and relays. They have a special combination profile and are available in a slotted/Phillips or slotted/Pozidriv design.



Wiha Xeno bits.

- The special slotted/Phillips or slotted/Pozidriv profile of the Xeno is optimally suited for terminal screws
- The combination profile reduces slipping and ensures greater torque transfer

For terminal screws (slotted/Phillips).



7049XH Xeno bit, slotted/ Phillips, style E 6.3.
For terminal screws (slotted/ Phillips).
 Material: High grade chrome-vanadium steel, through hardened.
 Drive: DIN 3126, ISO 1173, style E 6.3.
 Application: For fastening and unfastening positive/ negative screws in switchboard systems, fuse boxes, terminal blocks and relays.

| Order-No. | ⌀ | ↔ | ↔ |
|-----------|--------|----|---|
| 32490 2 | SL/PH1 | 50 | 5 |
| 32491 9 | SL/PH1 | 70 | 5 |
| 32686 9 | SL/PH1 | 90 | 5 |
| 32492 6 | SL/PH2 | 50 | 5 |
| 32493 3 | SL/PH2 | 70 | 5 |
| 32687 6 | SL/PH2 | 90 | 5 |

For terminal screws (slotted/Pozidriv).



7049XZ Xeno bit, slotted/ Pozidriv, style E 6.3.
For terminal screws (slotted/ Pozidriv).
 Material: High grade chrome-vanadium steel, through hardened.
 Drive: DIN 3126, ISO 1173, style E 6.3.
 Application: For fastening and unfastening positive/ negative screws in switchboard systems, fuse boxes, terminal blocks and relays.

| Order-No. | ⌀ | ↔ | ↔ |
|-----------|--------|----|---|
| 32494 0 | SL/PZ1 | 50 | 5 |
| 32495 7 | SL/PZ1 | 70 | 5 |
| 32688 3 | SL/PZ1 | 90 | 5 |
| 32496 4 | SL/PZ2 | 50 | 5 |
| 32497 1 | SL/PZ2 | 70 | 5 |
| 32689 0 | SL/PZ2 | 90 | 5 |

Wiha Standard bit.

Full programme range in outstanding quality.

Style E 6.3 (1/4").



7040 Z Standard bit, slotted, style E 6.3.

Material: High grade chrome-vanadium steel, through hardened.
 Drive: DIN 3126, ISO 1173, style E 6.3.
 Application: For all types of screw applications in trade and industry.

| Order-No. | Ø | ↔ | ⊖ | ↔ |
|-----------|-----|----|-----|---|
| 33961 6 | 2.5 | 70 | 0.4 | 5 |
| 01790 3 | 3.0 | 50 | 0.5 | 5 |
| 33962 3 | 3.0 | 70 | 0.5 | 5 |
| 01792 7 | 3.5 | 50 | 0.6 | 5 |
| 33963 0 | 3.5 | 70 | 0.6 | 5 |
| 01791 0 | 4.0 | 50 | 0.5 | 5 |
| 01794 1 | 4.0 | 50 | 0.8 | 5 |
| 33964 7 | 4.0 | 70 | 0.8 | 5 |
| 01793 4 | 4.5 | 50 | 0.6 | 5 |
| 01795 8 | 5.5 | 50 | 0.8 | 5 |
| 01796 5 | 5.5 | 50 | 1.0 | 5 |
| 33965 4 | 5.5 | 70 | 1.0 | 5 |
| 01798 9 | 6.5 | 50 | 1.2 | 5 |
| 33966 1 | 6.5 | 70 | 1.2 | 5 |
| 01799 6 | 8.0 | 50 | 1.2 | 5 |
| 01800 9 | 8.0 | 50 | 1.6 | 5 |



7041 Z Standard bit, Phillips, style E 6.3.

Material: High grade chrome-vanadium steel, through hardened.
 Drive: DIN 3126, ISO 1173, style E 6.3.
 Application: For all types of screw applications in trade and industry.
 Extra: Overlength bits available in lengths of 50, 70, 90, 110, 127 and 150 mm.

| Order-No. | ⊕ | ↔ | ↔ | ↔ |
|-----------|------|-----|-----|---|
| 31960 1 | PH00 | 50 | | 5 |
| 31961 8 | PH00 | 70 | | 5 |
| 31962 5 | PH00 | 90 | | 5 |
| 32105 5 | PH0 | 50 | | 5 |
| 35456 5 | PH0 | 70 | NEW | 5 |
| 35457 2 | PH0 | 90 | NEW | 5 |
| 33703 2 | PH1 | 50 | | 5 |
| 01803 0 | PH1 | 70 | | 5 |
| 04126 7 | PH1 | 90 | | 5 |
| 23213 9 | PH1 | 110 | | 5 |
| 23219 1 | PH1 | 127 | | 5 |
| 22509 4 | PH1 | 150 | | 5 |
| 33704 9 | PH2 | 50 | | 5 |
| 01805 4 | PH2 | 70 | | 5 |
| 04009 3 | PH2 | 90 | | 5 |
| 05800 5 | PH2 | 110 | | 5 |
| 06888 2 | PH2 | 127 | | 5 |
| 22510 0 | PH2 | 150 | | 5 |
| 33705 6 | PH3 | 50 | | 5 |
| 04010 9 | PH3 | 70 | | 5 |
| 04127 4 | PH3 | 90 | | 5 |
| 23215 3 | PH3 | 110 | | 5 |
| 23217 7 | PH3 | 127 | | 5 |
| 22511 7 | PH3 | 150 | | 5 |

Style E 6.3 (1/4").



7042 Z Standard bit, Pozidriv, style E 6.3.

Material: High grade chrome-vanadium steel, through hardened.
 Drive: DIN 3126, ISO 1173, style E 6.3.
 Application: For all types of screw applications in trade and industry.
 Extra: Overlength bits available in lengths of 50, 70, 90, 110, 127 and 150 mm.

| Order-No. | ⊕ | ↔ | ↔ | ↔ |
|-----------|-----|-----|---|---|
| 31957 1 | PZ0 | 50 | | 5 |
| 31958 8 | PZ0 | 70 | | 5 |
| 31959 5 | PZ0 | 90 | | 5 |
| 33706 3 | PZ1 | 50 | | 5 |
| 01808 5 | PZ1 | 70 | | 5 |
| 01809 2 | PZ1 | 90 | | 5 |
| 23221 4 | PZ1 | 110 | | 5 |
| 23225 2 | PZ1 | 127 | | 5 |
| 23227 6 | PZ1 | 150 | | 5 |
| 33707 0 | PZ2 | 50 | | 5 |
| 01811 5 | PZ2 | 70 | | 5 |
| 01812 2 | PZ2 | 90 | | 5 |
| 05799 2 | PZ2 | 110 | | 5 |
| 06889 9 | PZ2 | 127 | | 5 |
| 23228 3 | PZ2 | 150 | | 5 |
| 33708 7 | PZ3 | 50 | | 5 |
| 04059 8 | PZ3 | 70 | | 5 |
| 04176 2 | PZ3 | 90 | | 5 |
| 23223 8 | PZ3 | 110 | | 5 |
| 23226 9 | PZ3 | 127 | | 5 |
| 22512 4 | PZ3 | 150 | | 5 |



NEW 7045R Standard bit, TORX® with MagicSpring®, style E 6.3.

Material: High grade chrome-vanadium steel, through hardened.
 Drive: DIN 3126, ISO 1173, style E 6.3.
 Application: For all types of screw applications in trade and industry.
 Extra: MagicSpring® made of stainless steel holds TORX® screws tight at various angles.
 Attention: Screw must not be attached to the rotating bit.

| Order-No. | ⊕ | ↔ | ↔ | ↔ |
|-----------|-----|----|---|---|
| 34452 8 | T10 | 50 | | 5 |
| 34453 5 | T15 | 50 | | 5 |
| 34454 2 | T20 | 50 | | 5 |
| 34455 9 | T25 | 50 | | 5 |
| 34456 6 | T30 | 50 | | 5 |
| 34457 3 | T40 | 50 | | 5 |

Style E 6.3 (1/4").



7045BE Standard bit, TORX® ball head, style E 6.3.

Material: High grade chrome-vanadium steel, through hardened.
 Drive: DIN 3126, ISO 1173, style E 6.3.
 Application: For all internal TORX® screws, especially in hard-to-reach places.
 Extra: The TORX® ball end enables fastening and unfastening at an angle of up to 25°. With elongated TORX® profile behind ball end.

| Order-No. | ⊕ | ↔ | ↔ | ↔ |
|-----------|-----|----|---|---|
| 32409 4 | T9 | 50 | | 5 |
| 32410 0 | T10 | 50 | | 5 |
| 32416 2 | T10 | 70 | | 5 |
| 32417 9 | T15 | 50 | | 5 |
| 32418 6 | T15 | 70 | | 5 |
| 32411 7 | T20 | 50 | | 5 |
| 32419 3 | T20 | 70 | | 5 |
| 32420 9 | T20 | 90 | | 5 |
| 32412 4 | T25 | 50 | | 5 |
| 32421 6 | T25 | 70 | | 5 |
| 32422 3 | T25 | 90 | | 5 |
| 32413 1 | T27 | 50 | | 5 |
| 32414 8 | T30 | 50 | | 5 |
| 32423 0 | T30 | 70 | | 5 |
| 32424 7 | T30 | 90 | | 5 |
| 32415 5 | T40 | 50 | | 5 |



7045BE 9570 Standard bits with TORX® ball end in compact bit band, 10 pcs.

Bits: 70 mm Standard bits.
 Application: Extra long bits for all types of fastening in trade and industry.
 Extra: Compact plastic bit band with belt clip.

| Order-No. | Series | ↔ | ↔ |
|-----------|-------------|-------------------------------|---|
| 32804 7 | 7045BE 9570 | | 1 |
| ⊕ | 7045BE | 2xT10 2xT15 2xT20 2xT25 2xT30 | |

Style E 6.3 (1/4").



7045 Z Standard bit, TORX®, style E 6.3.

Material: High grade chrome-vanadium steel, through hardened.
 Drive: DIN 3126, ISO 1173, style E 6.3.
 Application: For all types of screw applications in trade and industry.
 Extra: Overlength bits in lengths of 50, 70, 90, 110 and 150 mm.

| Order-No. | ⊕ | ↔ | ↔ | ↔ |
|-----------|-----|-----|---|---|
| 32299 1 | T5 | 50 | | 5 |
| 32302 8 | T6 | 50 | | 5 |
| 33709 4 | T6 | 70 | | 5 |
| 33717 9 | T6 | 90 | | 5 |
| 32303 5 | T7 | 50 | | 5 |
| 33710 0 | T7 | 70 | | 5 |
| 33718 6 | T7 | 90 | | 5 |
| 32304 2 | T8 | 50 | | 5 |
| 33711 7 | T8 | 70 | | 5 |
| 33719 3 | T8 | 90 | | 5 |
| 32305 9 | T9 | 50 | | 5 |
| 33712 4 | T9 | 70 | | 5 |
| 33720 9 | T9 | 90 | | 5 |
| 32306 6 | T10 | 50 | | 5 |
| 33713 1 | T10 | 70 | | 5 |
| 33721 6 | T10 | 90 | | 5 |
| 33725 4 | T10 | 110 | | 5 |
| 33726 1 | T10 | 150 | | 5 |
| 32307 3 | T15 | 50 | | 5 |
| 33714 8 | T15 | 70 | | 5 |
| 33722 3 | T15 | 90 | | 5 |
| 33727 8 | T15 | 110 | | 5 |
| 33728 5 | T15 | 150 | | 5 |
| 32308 0 | T20 | 50 | | 5 |
| 33715 5 | T20 | 70 | | 5 |
| 33723 0 | T20 | 90 | | 5 |
| 33729 2 | T20 | 110 | | 5 |
| 33730 8 | T20 | 150 | | 5 |
| 32309 7 | T25 | 50 | | 5 |
| 33716 2 | T25 | 70 | | 5 |
| 33724 7 | T25 | 90 | | 5 |
| 33731 5 | T25 | 110 | | 5 |
| 33732 2 | T25 | 150 | | 5 |
| 33920 3 | T27 | 50 | | 5 |
| 33921 0 | T27 | 70 | | 5 |
| 33922 7 | T27 | 90 | | 5 |
| 33923 4 | T30 | 50 | | 5 |
| 33924 1 | T30 | 70 | | 5 |
| 33925 8 | T30 | 90 | | 5 |
| 33926 5 | T30 | 110 | | 5 |
| 33927 2 | T30 | 150 | | 5 |
| 33928 9 | T40 | 50 | | 5 |
| 33929 6 | T40 | 70 | | 5 |
| 33930 2 | T40 | 90 | | 5 |
| 33931 9 | T40 | 110 | | 5 |
| 33932 6 | T40 | 150 | | 5 |

Wiha Standard bit.

Full programme range in outstanding quality.

Style E 6.3 (1/4").



7045 Z TR Standard bit, TORX® H, style E 6.3.

Material: High grade chrome-vanadium steel, through hardened.
 Drive: DIN 3126, ISO 1173, style E 6.3.
 Application: For all types of screw applications in trade and industry.
 Extra: Hole in the bit tip for TORX® Tamper Resistant security screws.

| Order-No. | ⊕ | ↔ | ▬ |
|-----------|------|----|---|
| 21045 8 | T7H | 50 | 5 |
| 21047 2 | T8H | 50 | 5 |
| 20218 7 | T9H | 50 | 5 |
| 20219 4 | T10H | 50 | 5 |
| 24867 3 | T15H | 50 | 5 |
| 20220 0 | T20H | 50 | 5 |
| 20221 7 | T25H | 50 | 5 |
| 20222 4 | T27H | 50 | 5 |
| 20223 1 | T30H | 50 | 5 |
| 20224 8 | T40H | 50 | 5 |

Style E 6.3 (1/4").



7046 Z Standard bit, TORX PLUS®, style E 6.3.

Material: High grade chrome-vanadium steel, through hardened.
 Drive: DIN 3126, ISO 1173, style E 6.3.
 Application: For all types of screw applications in trade and industry.
 Extra: Reinforced profile cross-section transfers approx. 25% more torque than with a TORX® profile.

| Order-No. | ● | ↔ | ▬ |
|-----------|------|----|---|
| 28481 7 | 5IP | 50 | 5 |
| 26000 2 | 6IP | 50 | 5 |
| 26002 6 | 7IP | 50 | 5 |
| 23195 8 | 8IP | 50 | 5 |
| 23197 2 | 9IP | 50 | 5 |
| 23199 6 | 10IP | 50 | 5 |
| 23201 6 | 15IP | 50 | 5 |
| 23203 0 | 20IP | 50 | 5 |
| 23205 4 | 25IP | 50 | 5 |
| 23207 8 | 27IP | 50 | 5 |
| 23209 2 | 30IP | 50 | 5 |
| 23211 5 | 40IP | 50 | 5 |

Style E 6.3 (1/4").



7047R Z Standard bit, ball end hex, style E 6.3.

Material: High grade chrome-vanadium steel, through hardened.
 Drive: DIN 3126, ISO 1173, style E 6.3.
 Application: For all types of screw applications in trade and industry.
 To insert and remove screws from holes or cavities, specially in difficult to access areas.
 Extra: MagicRing® made from spring steel holds all standard screws in every position.
 Ball end allows a working angle up to 25°.

| Order-No. | ● | ↔ | ▬ |
|-----------|-----|----|---|
| 25739 2 | 3.0 | 50 | 5 |
| 25740 8 | 4.0 | 50 | 5 |
| 25741 5 | 5.0 | 50 | 5 |
| 25742 2 | 6.0 | 50 | 5 |

Style E 6.3 (1/4").



7043 Z Standard bit, hex, style E 6.3.

Material: High grade chrome-vanadium steel, through hardened.
 Drive: DIN 3126, ISO 1173, style E 6.3.
 Application: For all types of screw applications in trade and industry.

| Order-No. | ● | ↔ | ▬ |
|-----------|-----|----|-------|
| 05301 7 | 1.5 | 50 | 5 |
| 05302 4 | 2.0 | 50 | 5 |
| 34554 9 | 2.0 | 70 | NEW 5 |
| 05303 1 | 2.5 | 50 | 5 |
| 34555 6 | 2.5 | 70 | NEW 5 |
| 04194 6 | 3.0 | 50 | 5 |
| 34556 3 | 3.0 | 70 | NEW 5 |
| 04195 3 | 4.0 | 50 | 5 |
| 34557 0 | 4.0 | 70 | NEW 5 |
| 04196 0 | 5.0 | 50 | 5 |
| 34558 7 | 5.0 | 70 | NEW 5 |
| 04197 7 | 6.0 | 50 | 5 |
| 34559 4 | 6.0 | 70 | NEW 5 |
| 04198 4 | 8.0 | 50 | 5 |
| 34560 0 | 8.0 | 70 | NEW 5 |



7043R Z Standard bit, hex, style E 6.3.

Material: High grade chrome-vanadium steel, through hardened.
 Drive: DIN 3126, ISO 1173, style E 6.3.
 Application: For all types of screw applications in trade and industry.
 To insert and remove screws from holes or cavities.
 Extra: MagicRing® made from spring steel holds all standard screws in every position.

| Order-No. | ● | ↔ | ▬ |
|-----------|-----|----|---|
| 23145 3 | 3.0 | 50 | 5 |
| 23147 7 | 4.0 | 50 | 5 |
| 23149 1 | 5.0 | 50 | 5 |
| 23151 4 | 6.0 | 50 | 5 |



7048 Z Standard bit, Robertson, style E 6.3.

Material: High grade chrome-vanadium steel, through hardened.
 Drive: DIN 3126, ISO 1173, style E 6.3.
 Application: For all types of screw applications in trade and industry.
 Extra: A tapered tip allows for easy insertion of the bit into the screw.

| Order-No. | ● | ↔ | ▬ |
|-----------|---|----|---|
| 06637 6 | 1 | 50 | 5 |
| 06638 3 | 2 | 50 | 5 |
| 06639 0 | 3 | 50 | 5 |

Wiha Info



Wiha MagicRing®:
 spring steel ring
 reliably holds hex screws
 in place.

Wiha threaded bit.

For optimised use in stationary screw systems.


For M4 and M5.



7311 Z Threaded bit M4, Phillips.

Material: High grade chrome-vanadium steel, through hardened.
Drive: Screw thread M4.
Application: For optimised use in stationary screw systems.

| Order-No. | Profile | Drive | Length | Material | Application | |
|-----------|---------|-------|--------|----------|-------------|----|
| 01937 2 | PH1 | 33 | 5.5 | M4 | 8.00 | 10 |
| 01938 9 | PH2 | 33 | 6.0 | M4 | 8.00 | 10 |



7312 Z Threaded bit M4, Pozidriv.

Material: High grade chrome-vanadium steel, through hardened.
Drive: Screw thread M4.
Application: For optimised use in stationary screw systems.

| Order-No. | Profile | Drive | Length | Material | Application | |
|-----------|---------|-------|--------|----------|-------------|----|
| 01939 6 | PZ1 | 33 | 5.5 | M4 | 8.00 | 10 |
| 01940 2 | PZ2 | 33 | 6.0 | M4 | 8.00 | 10 |



7321 Z Threaded bit M5, Phillips.

Material: High grade chrome-vanadium steel, through hardened.
Drive: Screw thread M5.
Application: For optimised use in stationary screw systems.


| Order-No. | Profile | Drive | Length | Material | Application | |
|-----------|---------|-------|--------|----------|-------------|----|
| 01942 6 | PH2 | 33 | 7.0 | M5 | 8.00 | 10 |
| 01943 3 | PH2 | 45 | 6.0 | M5 | 8.00 | 10 |



7322 Z Threaded bit M5, Pozidriv.

Material: High grade chrome-vanadium steel, through hardened.
Drive: Screw thread M5.
Application: For optimised use in stationary screw systems.

| Order-No. | Profile | Drive | Length | Material | Application | |
|-----------|---------|-------|--------|----------|-------------|----|
| 01945 7 | PZ2 | 33 | 7.0 | M5 | 8.00 | 10 |
| 01946 4 | PZ2 | 45 | 6.0 | M5 | 8.00 | 10 |



NEW 7325 Z Threaded bit M5, TORX®.

Material: High grade chrome-vanadium steel, through hardened.
Drive: Screw thread M5.
Application: For optimised use in stationary screw systems.

| Order-No. | Profile | Drive | Length | Material | Application | |
|-----------|---------|-------|--------|----------|-------------|----|
| 35400 8 | T10 | 45 | 6.0 | M5 | 8.00 | 10 |
| 35401 5 | T15 | 45 | 6.0 | M5 | 8.00 | 10 |
| 35402 2 | T20 | 45 | 6.0 | M5 | 8.00 | 10 |
| 35403 9 | T25 | 45 | 6.0 | M5 | 8.00 | 10 |

For M6 and 10/32" UNF.



7331 Z Threaded bit M6, Phillips.

Material: High grade chrome-vanadium steel, through hardened.
Drive: Screw thread M6.
Application: For optimised use in stationary screw systems.

| Order-No. | Profile | Drive | Length | Material | Application | |
|-----------|---------|-------|--------|----------|-------------|----|
| 04678 1 | PH2 | 33 | 8.0 | M6 | 8.00 | 10 |
| 04677 4 | PH2 | 45 | 8.0 | M6 | 8.00 | 10 |



7332 Z Threaded bit M6, Pozidriv.

Material: High grade chrome-vanadium steel, through hardened.
Drive: Screw thread M6.
Application: For optimised use in stationary screw systems.

| Order-No. | Profile | Drive | Length | Material | Application | |
|-----------|---------|-------|--------|----------|-------------|----|
| 04671 2 | PZ2 | 33 | 8.0 | M6 | 8.00 | 10 |
| 04670 5 | PZ2 | 45 | 8.0 | M6 | 8.00 | 10 |



7341 Z Threaded bit 10/32" UNF, Phillips.

Material: High grade chrome-vanadium steel, through hardened.
Drive: Screw thread 10/32" UNF.
Application: For optimised use in stationary screw systems.

| Order-No. | Profile | Drive | Length | Material | Application | |
|-----------|---------|-------|--------|-----------|-------------|----|
| 01947 1 | PH2 | 45 | 6.0 | 10/32 UNF | 8.00 | 10 |



7342 Z Threaded bit 10/32" UNF, Pozidriv.

Material: High grade chrome-vanadium steel, through hardened.
Drive: Screw thread 10/32" UNF.
Application: For optimised use in stationary screw systems.

| Order-No. | Profile | Drive | Length | Material | Application | |
|-----------|---------|-------|--------|-----------|-------------|----|
| 01948 8 | PZ2 | 45 | 6.0 | 10/32 UNF | 8.00 | 10 |

Wiha special bits.

Customised for your application.


| Construction Kit | Drive | No. | Profile | No. | Length |
|------------------|-------|-----|-----------------|--------|--------------------|
| | C 4 | = 0 | Slotted | = 0 | for 25 mm - 152 mm |
| | C 6,3 | = 1 | Phillips PH | = 1 | |
| | C 8 | = 2 | Pozidriv PZ | = 2 | |
| | A 5,5 | = 3 | Hex | = 3 | |
| | E 6,3 | = 5 | TORX® | = 5 | |
| | G 7 | = 6 | TORX PLUS® | = 6 | |
| | | | Ball end hex | = 7 | |
| | | | Robertson | = 8 | |
| | | | Special profile | = 9 | |
| | | | Spanner | = 9 SP | |
| | | | Torq-Set® | = 9 TS | |
| | | | Tri-Wing® | = 9 TW | |



Make the most of our experience. Our expertise in the manufacture of all types of tools for screw applications enables us to produce bits to your specifications.

Sophisticated manufacturing facilities with qualified employees, state-of-the-art machinery and a certified quality assurance system guarantee you maximum quality and flexibility.

The construction of your special bit.

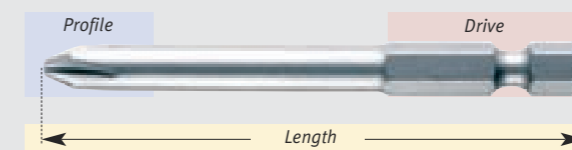

The Wiha special bit programme is a construction system for your custom bit.

Advantages:

- Attractive price
- No additional cost for technical drawings
- Short delivery time
- Flexibility

Wiha Industry Quality – The highest standard of bits.

Industrial-quality tools are an essential part of the Wiha tool kit. We adjust the hardness, coating, shape and concentricity of the bits to your requirements.

Hardness: 57 HRC - 63 HRC
Coating: Tungsten Carbide (Dura), Diamand, TiN
Style: According to technical drawing
Straightness: Guaranteed straightness with a tolerance of +/- 0.05 mm.

Perfect concentricity:

Perfect straightness is especially important for bits that must be used in automated machines, production lines or guide jackets.

Advantages:

- Screws will be securely fastened.
- Vibrations are reduced as the bit is balanced.
- Time saving, as straight bits cause less problems.

Wiha special bits.

For ex., Wiha Halfmoon bits.

- Halfmoon bits are predominantly used on production lines for high-tech products, such as hard disks and mobile phones.
- The halfmoon drive ensures a secure fit and straightforward bit exchange.
- Our customers require an exact fit and maximum truth of running for a frictionless production process.
- Wiha bits are being used to optimum effect by big-name companies operating all over the world.

Contact us. We would be pleased to help.

Wiha bits style C 4.

For screw connections in miniature applications.

These bits fit directly in the machines of the manufacturers: **Perret**



7000 Z Standard bit, slotted, style C 4.
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 4.
Application: For particularly small screws.

| Order-No. | Ø | ↔ | ⊖ | ↔ |
|-----------|-----|----|------|----|
| 04728 3 | 0.8 | 28 | 0.20 | 10 |
| 04727 6 | 1.2 | 28 | 0.25 | 10 |
| 04726 9 | 1.5 | 28 | 0.25 | 10 |
| 04725 2 | 1.8 | 28 | 0.30 | 10 |
| 04724 5 | 2.0 | 28 | 0.40 | 10 |
| 04723 8 | 2.5 | 28 | 0.40 | 10 |
| 04722 1 | 3.0 | 28 | 0.50 | 10 |
| 04721 4 | 3.5 | 28 | 0.60 | 10 |
| 04729 0 | 4.0 | 28 | 0.80 | 10 |



7005 Z Standard bit, TORX®, style C 4.
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 4.
Application: For particularly small screws.

| Order-No. | Symbol | ↔ | ↔ |
|-----------|--------|----|----|
| 20842 7 | T3 | 28 | 10 |
| 20843 1 | T4 | 28 | 10 |
| 04716 0 | T5 | 28 | 10 |
| 04715 3 | T6 | 28 | 10 |
| 04714 6 | T7 | 28 | 10 |
| 04713 9 | T8 | 28 | 10 |
| 04712 2 | T9 | 28 | 10 |
| 04711 5 | T10 | 28 | 10 |



7001 Z Standard bit, Phillips, style C 4.
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 4.
Application: For particularly small screws.

| Order-No. | Symbol | ↔ | ↔ |
|-----------|--------|----|----|
| 04720 7 | PH000 | 28 | 10 |
| 04719 1 | PH00 | 28 | 10 |
| 04718 4 | PH0 | 28 | 10 |
| 04717 7 | PH1 | 28 | 10 |



7003 Z Standard bit, hex, style C 4.
Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 4.
Application: For particularly small screws.


| Order-No. | Symbol | ↔ | ↔ |
|-----------|--------|----|----|
| 04737 5 | 0.7 | 28 | 10 |
| 04736 8 | 0.9 | 28 | 10 |
| 04735 1 | 1.3 | 28 | 10 |
| 04734 4 | 1.5 | 28 | 10 |
| 04733 7 | 2.0 | 28 | 10 |
| 04732 0 | 2.5 | 28 | 10 |
| 04731 3 | 3.0 | 28 | 10 |
| 04730 6 | 4.0 | 28 | 10 |



7110M Universal holder, magnetic, style E 6.3.
Suitable for: For bits according to DIN 3126, ISO1173 style C 4.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: Suitable for 4 mm bits, e.g. Wiha 7000-7005 series.
Extra: With magnet.

| Order-No. | Symbol | Symbol | ↔ | ↔ |
|-----------|--------|--------|----|----|
| 32505 3 | C4 | 1/4 | 60 | 10 |

Accessories for Wiha bits, style C 4.



2691 SYSTEM 4 SoftFinish®-telescopic handle.
Ergonomic multi-component handle with roll-off protection.
Handle: With 4 mm hex retainer for all SYSTEM 4 blades.
Enables adjustable blade lengths from 18 - 90 mm.
ClickStop ball clamp guarantees a secure hold and rapid blade exchange.
Application: Ideal for all precision work in the fields of electronics and mechanics.

| Order-No. | Symbol | ↔ | ↔ | ↔ |
|-----------|--------|-----|----|----|
| 30373 0 | 4.0 | 105 | 23 | 10 |



U759 00 SYSTEM 4 bit holder.
Suitable for C 4 (4 mm) bits.
Blade: Chrome-vanadium steel, through hardened, electro-plated.

| Order-No. | Symbol | ↔ | Symbol | ↔ | ↔ |
|-----------|--------|-----|--------|---|---|
| 09195 8 | 4.0 | 135 | 4.0 | 9 | 1 |



7000 EB16 ESD SYSTEM 4 ESD bit set, 16 pcs.
Mixed sets.
Handle: SYSTEM 4 SoftFinish®-telescopic ESD handle.
ESD-safe (dissipative), surface resistance 10⁶ - 10⁹ ohms.
Enables adjustable bit holder blade length.
Standards: DIN 3126, ISO 1173, style C 4. IEC 61340-5-1.
Application: Bit set suitable for smallest screws with electronic components.
Flexible working via adjustable blade length and rapid replacement of bit inserts.

| Order-No. | Series | ↔ |
|-----------|--|---|
| 33503 8 | 7000 EB16 ESD | 1 |
| 2691ESD | SYSTEM 4 SoftFinish®-telescopic ESD handle | |
| U759 00 | SYSTEM 4 bit holder | |
| U 750 | 1x2.0 1x3.0 | |
| U 751 | 1xPH000 1xPH00 1xPH0 1xPH1 | |
| U 757 | 1xT3 1xT4 1xT5 1xT6 1xT8 | |
| U 753 | 1x0.9 1x1.3 1x1.5 | |



7000 EB26 ESD SYSTEM 4 ESD bit set, 26 pcs.
Mixed sets.
Handle: SYSTEM 4 SoftFinish®-telescopic ESD handle.
ESD-safe (dissipative), surface resistance 10⁶ - 10⁹ ohms.
Enables adjustable bit holder blade length.
Standards: DIN 3126, ISO 1173, style C 4. IEC 61340-5-1.
Application: Universal set for especially small screws with electronic components.
Flexible working via adjustable blade length and rapid replacement of bit inserts.

| Order-No. | Series | ↔ |
|-----------|--|---|
| 33848 0 | 7000 EB26 ESD | 1 |
| 2691ESD | SYSTEM 4 SoftFinish®-telescopic ESD handle | |
| U759 00 | SYSTEM 4 bit holder | |
| U 750 | 1x1.5 1x2.0 1x3.0 1x4.0 | |
| U 751 | 1xPH000 1xPH0 1xPH1 | |
| U 757 | 1xT3 1xT4 1xT5 1xT6 1xT7 | |
| | 1xT8 1xT9 1xT10 | |
| U 753 | 1x0.7 1x0.9 1x1.3 1x1.5 1x2.0 | |
| | 1x2.5 1x3.0 1x4.0 | |

ESD-Safe • Telescopic

► See also page 260 - 291

ESD-Safe • Telescopic

► See also page 260 - 291

Wiha bits for drive system style C 8 (5/16") and style G 7.

Style C 8 (5/16").



7020 Z Standard bit, slotted, style C 8.

Material: High grade chrome-vanadium steel, through hardened.
Drive: DIN 3126, ISO 1173, style C 8.

| Order-No. | Ø | → | ⇄ | ⇄ |
|-----------|------|----|-----|----|
| 01741 5 | 5.5 | 41 | 0.8 | 10 |
| 01742 2 | 5.5 | 41 | 1.0 | 10 |
| 01744 6 | 6.5 | 41 | 1.2 | 10 |
| 01745 3 | 8.0 | 41 | 1.2 | 10 |
| 01746 0 | 8.0 | 41 | 1.6 | 10 |
| 01747 7 | 10.0 | 41 | 1.6 | 10 |
| 01748 4 | 12.0 | 41 | 2.0 | 10 |



7021 Z Standard bit, Phillips, style C 8.

| Order-No. | ⊕ | → | ⇄ |
|-----------|-----|----|----|
| 01749 1 | PH1 | 32 | 10 |
| 01750 7 | PH2 | 32 | 10 |
| 01751 4 | PH3 | 32 | 10 |
| 01753 8 | PH4 | 38 | 10 |



7022 Z Standard bit, Pozidriv, style C 8.

| Order-No. | ⊕ | → | ⇄ |
|-----------|-----|----|----|
| 01754 5 | PZ1 | 32 | 10 |
| 01755 2 | PZ2 | 32 | 10 |
| 01756 9 | PZ3 | 32 | 10 |
| 01758 3 | PZ4 | 38 | 10 |



7025 Z Standard bit, TORX®, style C 8.

| Order-No. | ⊗ | → | ⇄ |
|-----------|-----|----|----|
| 01765 1 | T25 | 35 | 10 |
| 01766 8 | T27 | 35 | 10 |
| 01767 5 | T30 | 35 | 10 |
| 01768 2 | T40 | 35 | 10 |
| 01769 9 | T45 | 35 | 10 |
| 01770 5 | T50 | 35 | 10 |
| 01771 2 | T55 | 35 | 10 |



7023 Z Standard bit, hex, style C 8.

| Order-No. | ⊙ | → | ⇄ |
|-----------|------|----|----|
| 01759 0 | 3.0 | 30 | 10 |
| 01760 6 | 4.0 | 30 | 10 |
| 01761 3 | 5.0 | 30 | 10 |
| 01762 0 | 6.0 | 30 | 10 |
| 01763 7 | 8.0 | 30 | 10 |
| 01764 4 | 10.0 | 30 | 10 |

Style G 7.



7081 ZOT ZOT Torsion bit, Phillips, style G 7.

Material: High grade chrome-vanadium steel, through hardened.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Drive: DIN 3126, ISO 1173, style G 7.

| Order-No. | ⊕ | → | ⇄ |
|-----------|-----|----|---|
| 04960 7 | PH1 | 53 | 5 |
| 04961 4 | PH2 | 53 | 5 |
| 04962 1 | PH3 | 53 | 5 |



7082 ZOT ZOT Torsion bit, Pozidriv, style G 7.

Material: High grade chrome-vanadium steel, through hardened.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Drive: DIN 3126, ISO 1173, style G 7.

| Order-No. | ⊕ | → | ⇄ |
|-----------|-----|----|---|
| 04553 1 | PZ1 | 53 | 5 |
| 04552 4 | PZ2 | 53 | 5 |
| 04551 7 | PZ3 | 53 | 5 |



7183 Universal holder, magnetic/retaining ring, style G 7.

Sleeve: Stainless steel.
Suitable for: For bits according to DIN 3126, ISO1173 style C 6.3.
Drive: DIN 3126, ISO 1173, style G 7.
Application: For applications where the bit must be held tight e.g. assembly lines.

| Order-No. | ⊙ | ⊕ | → | ⇄ |
|-----------|-----|----|----|----|
| 01919 8 | 1/4 | G7 | 72 | 10 |

Wiha CentroFix system.

Quick and professional.



Drilling, countersinking, driving screws and cutting threads is child's play with the Wiha CentroFix System. The innovative CentroFix quick-release holder forms the basis for a variety of hex-driven tools.

With CentroFix System, Wiha once again demonstrates that the user is central. The trend towards battery-powered drivers is continuing undiminished. Efficient models are greatly increasing the number of application areas and enabling more flexible working conditions. The Wiha CentroFix System also opens up these application areas to professional use.

With the CentroFix quick-release holder, Wiha closes the gap between the chuck of the battery-powered drivers and the quick-release holder for driver bits. The CentroFix holder allows rapid tool change, provides a secure fit and meets the more demanding requirements for concentricity and pull-off forces.



Flexible, easy and quick – drill, countersink and turn screws with the Wiha CentroFix System for wood ...

... or with the Wiha CentroFix System for metal.

Wiha CentroFix system.

- **Quick**
Saves time when changing tools
- **Secure**
Fixed connection between tool insert and holder
- **Zero-play**
For exact boreholes
- **Universal**
Fits all 1/4" hex drives

CentroFix – one for all.



7148C CentroFix quick release holder, style E 6.3.

Sleeve: Metal, coated.
Suitable for: For bits according to DIN 3126, ISO1173 style C 6.3 and E 6.3.
Drive: DIN 3126, ISO 1173, style E 6.3.
Packaging: Plastic box, reusable and dust repellent.
Application: Whenever the bit needs a secure and zero-play hold. Optimised for the use of drill bits.
Extra: Due to the special holding mechanism, this bit holder holds all types of bits with 1/4" hex drive. The play between bit and holder is reduced to a minimum. Real single-handed operation for fast bit exchange.

| Order-No. | ⊙ | ⊕ | → | ⇄ |
|-----------|-----|-----|----|----|
| 32477 3 | 1/4 | 1/4 | 60 | 10 |

► **NEW:** CentroFix quick release holder with magnet, see page 148

Wiha drill bits.

Just keep on working.

Wood twist drill bit.



7804 Wood twist drill bit, style C 6.3.

Material: High grade chrome-molybdenum steel, ground.
Packaging: Blister packed.
Drive: With 1/4" hex shank according to DIN 3126 C 6.3.
Application: Especially suitable for boreholes in soft and hardwoods, as well as in veneered and coated laminated materials.
Extra: By means of careful rough-cutting, drilling of pocket holes is easy and does not tear the material.
With centring tip for exact drilling.
Particularly suitable for use in battery-powered drivers.

| Order-No. | Ø | ↔ | ↔ | ⊙ | ⊙ |
|-----------|------|-----|----|-----|----|
| 27873 1 | 3.0 | 70 | 36 | 1/4 | 10 |
| 27876 2 | 4.0 | 75 | 43 | 1/4 | 10 |
| 27877 9 | 5.0 | 85 | 56 | 1/4 | 10 |
| 27879 3 | 6.0 | 95 | 66 | 1/4 | 10 |
| 27880 9 | 8.0 | 110 | 81 | 1/4 | 10 |
| 27881 6 | 10.0 | 110 | 81 | 1/4 | 10 |



79184 T1 Wood twist drill set, 19 pcs.

Pouch: High-quality nylon pouch, 13 x 2 x 10 cm.
Bits: 25 mm Standard and Torsion bits, wood twist drill bits, countersink bit.
Holder: CentroFix quick release holder, magnetic, style E 6.3.
Application: Compact range for drilling, countersinking and driving screws in wood.
Extra: Pouch with sturdy metal belt clip.

| Order-No. | Series | ⊙ |
|------------|---|---|
| 28024 6 | 79184 T19 | 1 |
| 7804 | 1x3.0 1x4.0 1x5.0 1x6.0 1x8.0 | |
| 7806 | 1x12.4 | |
| 7011 ZOT | 1xPH2 | |
| 7012 ZOT | 1xPZ1 3xPZ2 1xPZ3 | |
| 7015 Z | 1xT15 1xT20 1xT25 1xT30 | |
| 7019 Z SIT | 1xSIT 20 1xSIT 30 | |
| 7148C | CentroFix quick release holder, style E 6.3 | |

7918 TL Nylon pouch, empty.

| Order-No. | Series | ⊙ |
|-----------|---------|---|
| 28028 4 | 7918 TL | 1 |

Twist drill bit.



7805 Twist drill bit, style C 6.3.

Material: High-quality HSS steel, ground.
Packaging: Blister packed.
Drive: With 1/4" hex shank according to DIN 3126 C 6.3.
Application: Universal application in metal, plastic and wood.
Extra: Particularly suitable for use in battery-powered drivers.
Special rivet-hole sizes 3.1, 4.1 and 5.1.

| Order-No. | Ø | ↔ | ↔ | ⊙ | ⊙ |
|-----------|------|----|----|-----|----|
| 27882 3 | 3.0 | 38 | 16 | 1/4 | 10 |
| 28055 0 | 3.1 | 38 | 16 | 1/4 | 10 |
| 27883 0 | 3.3 | 40 | 18 | 1/4 | 10 |
| 27884 7 | 4.0 | 43 | 22 | 1/4 | 10 |
| 28056 7 | 4.1 | 43 | 22 | 1/4 | 10 |
| 27885 4 | 4.2 | 43 | 22 | 1/4 | 10 |
| 27886 1 | 5.0 | 48 | 26 | 1/4 | 10 |
| 28057 4 | 5.1 | 48 | 26 | 1/4 | 10 |
| 27887 8 | 6.0 | 48 | 26 | 1/4 | 10 |
| 27888 5 | 6.8 | 48 | 30 | 1/4 | 10 |
| 27889 2 | 8.0 | 50 | 32 | 1/4 | 10 |
| 27890 8 | 8.5 | 51 | 34 | 1/4 | 10 |
| 27891 5 | 10.0 | 54 | 37 | 1/4 | 10 |



79185 T1 Twist drill set, 19 pcs.

Pouch: High-quality nylon pouch, 13 x 2 x 10 cm.
Bits: 25 mm Standard and Torsion bits, twist drill bits.
Holder: CentroFix quick release holder, magnetic, style E 6.3.
Application: Compact assortment for universal application when driving screws.
Extra: Pouch with sturdy metal belt clip.

| Order-No. | Series | ⊙ |
|-----------|---|---|
| 28025 3 | 79185 T19 | 1 |
| 7805 | 1x3.0 1x4.0 1x4.2 1x5.0 1x6.0 1x8.0 | |
| 7011 ZOT | 2xPH1 3xPH2 1xPH3 | |
| 7012 ZOT | 2xPZ2 | |
| 7015 Z | 1xT15 1xT20 1xT25 1xT30 | |
| 7148C | CentroFix quick release holder, style E 6.3 | |

Combination drill bit. Countersink bit.



7807 Combination drill bit, style C 6.3.

Material: High-quality HSS steel, ground.
Packaging: Blister packed.
Drive: With 1/4" hex shank according to DIN 3126 C 6.3.
Application: Drilling, cutting threads and burring.
For assembly work, repair and rethreading.
Can be used in metal and plastic.
Extra: Three applications in a single work step.
Particularly suitable for use in battery-powered drivers.

| Order-No. | ⊙ | ↔ | ⊙ | ⊙ |
|-----------|-----|----|-----|----|
| 27897 7 | M3 | 36 | 1/4 | 10 |
| 27898 4 | M4 | 39 | 1/4 | 10 |
| 27899 1 | M5 | 41 | 1/4 | 10 |
| 27900 4 | M6 | 44 | 1/4 | 10 |
| 27901 1 | M8 | 51 | 1/4 | 10 |
| 27963 9 | M10 | 65 | 1/4 | 10 |



79187 B5 Combination drill bit set, 5 pcs.

Extra: In plastic box.
Order-No. Series ⊙

| | | |
|---------|-------------------------------|---|
| 28026 0 | 79187 B5 | 1 |
| 7807 | M3x36 M4x39 M5x41 M6x44 M8x51 | |



7806 Countersink bit, style C 6.3.

Material: High-quality HSS steel, ground.
Packaging: Blister packed.
Drive: With 1/4" hex shank according to DIN 3126 C 6.3.
Application: Universal application in metal, plastic and wood.
Extra: Particularly suitable for use in battery-powered drivers.
Guarantees outstanding removal of cuttings, no-rattle operation and smooth surface.

| Order-No. | Ø | ↔ | ⊙ | ⊙ | ∅ min. | ⊙ |
|-----------|------|----|-----|-----|--------|----|
| 27892 2 | 6.3 | 35 | 1/4 | M3 | 1.5 | 10 |
| 27893 9 | 8.3 | 35 | 1/4 | M4 | 2.0 | 10 |
| 27894 6 | 10.4 | 35 | 1/4 | M5 | 2.5 | 10 |
| 27895 3 | 12.4 | 35 | 1/4 | M6 | 2.8 | 10 |
| 27896 0 | 16.5 | 35 | 1/4 | M8 | 3.2 | 10 |
| 28058 1 | 20.5 | 35 | 1/4 | M10 | 3.5 | 10 |



79186 B5 Countersink set, 5 pcs.

Extra: In plastic box.
Order-No. Series ⊙

| | | |
|---------|---------------------------------------|---|
| 28027 7 | 79186 B5 | 1 |
| 7806 | 6.3x35 8.3x35 10.4x35 12.4x35 16.5x35 | |

Universal drill bit.



7848 Universal drill bit, style E 6.3.

Material: High-quality HSS steel, ground.
Packaging: Blister packed.
Drive: 1/4" hex universal drill in accordance with DIN 3126, style E 6.3.
Application: For use in (battery-powered) screwdrivers; suitable for drilling holes in a multitude of materials (light masonry, light building materials, non-ferrous metal, metal, wood, plastics etc.) as well as light drilling on smooth and hard surfaces.
Extra: Exact drilled holes via the special cutting edge. Especially long service life.

| Order-No. | Ø | ↔ | ↔ | ⊙ | ⊙ |
|-----------|----|-----|----|-----|----|
| 32292 2 | 4 | 85 | 45 | 1/4 | 10 |
| 32293 9 | 5 | 96 | 50 | 1/4 | 10 |
| 32294 6 | 6 | 101 | 60 | 1/4 | 10 |
| 32295 3 | 7 | 101 | 60 | 1/4 | 10 |
| 32296 0 | 8 | 120 | 70 | 1/4 | 10 |
| 32297 7 | 10 | 120 | 70 | 1/4 | 10 |



281-02 Bit holder with handle, magnetic, 1/4".

Handle: Wiha SoftFinish® multi-component handle with roll-off protection.
Bit holder: Stainless steel with strong magnet.
Suitable for: For bits according to DIN 3126, ISO1173 style C 6.3 and E 6.3.
Application: Compact screwdriver together with bits, 1/4".
Together with Wiha countersink bits, can be used as manual deburrer.

| Order-No. | ⊙ | ↔ | ↔ | ⊙ |
|-----------|-----|-----|----|---|
| 32160 4 | 1/4 | 125 | 36 | 1 |

Wiha nut driver product line.

The entire line for hand and machine use.



All those who place demanding requirements on their tools will find what they're looking for in the extensive Wiha nut driver product line for hand and machine use. For example, the high-quality (hexagon) nut driver inserts stand up to especially heavy loading. Another advantage is their hexagon opening with rounded corners: It grasps even flat bolts easily and extremely gently. With the incorporated permanent magnet and optional bit holder, particular attention was also paid to practical, user-friendly details. A remedy for tough cases: The new hand impact screwdriver with hand protection and a changeover function is a specialist for jammed bolts and nuts. The matching 5/16" bits for Phillips, slotted and TORX® drives are produced of special chrome vanadium steel and through-hardened to make them especially impact and break-resistant.



The jack-of-all-trades product line is rounded off with universal connection pieces/parts and smooth-running ratchets. With a universal joint (connection pieces) and a locking button (ratchets) for holding or quickly releasing the attached tools, they're excellently equipped for working in hard-to-reach places. The 3-component handle (SoftFinish®) of the ratchets also guarantees comfortable, safe use.

Whether tools or accessories, whether its hand or machine-operated nut drivers: With this versatile assortment the user is also equipped for difficult and special cases.



Wiha nut driver product line.

- Extensive application possibilities and large range of tools for electric and pneumatic screwdrivers and hand-operated nut drivers
- Nut driver inserts (1/4" drive) in high-quality special chrome vanadium steel; also available with incorporated permanent magnet that safely guides the screws when installing
- Hand impact screwdriver with hardened, lacquered impact end against chipping of chrome parts or mushroom-shaped deformations (p. 145)

For machine-operated nut driver inserts.



7244 Power nut driver insert, hex - style E 6.3.

Material: High-quality chrome vanadium alloy steel, through-hardened, phosphate coated surface.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For mechanical fastening and unfastening.
Extra: Rounded hex opening in the corners for protection of the screw heads.

| Order-No. | Ø | Ø | Ø | Ø | Ø |
|-----------|-----|----|----|---|---|
| 32513 8 | 5.5 | 9 | 50 | | 5 |
| 32514 5 | 7 | 11 | 50 | | 5 |
| 32515 2 | 8 | 12 | 50 | | 5 |
| 32516 9 | 10 | 14 | 50 | | 5 |
| 32517 6 | 12 | 17 | 50 | | 5 |
| 32518 3 | 13 | 18 | 50 | | 5 |
| 32519 0 | 1/4 | 10 | 50 | | 5 |



7244M Power nut driver insert, hex with magnet - style E 6.3.

Material: High-quality chrome vanadium alloy steel, through-hardened, phosphate coated surface.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For mechanical fastening and unfastening.
Extra: With a powerful permanent magnet incorporated in brass. Rounded hex opening in the corners for protection of the screw heads.

| Order-No. | Ø | Ø | Ø | Ø | Ø |
|-----------|------|----|----|---|---|
| 32520 6 | 5.5 | 9 | 50 | | 5 |
| 32521 3 | 6 | 10 | 50 | | 5 |
| 32522 0 | 7 | 11 | 50 | | 5 |
| 32523 7 | 8 | 12 | 50 | | 5 |
| 32524 4 | 10 | 14 | 50 | | 5 |
| 32525 1 | 12 | 17 | 50 | | 5 |
| 32526 8 | 13 | 18 | 50 | | 5 |
| 32528 2 | 1/4 | 10 | 50 | | 5 |
| 32530 5 | 5/16 | 12 | 50 | | 5 |
| 32529 9 | 3/8 | 14 | 50 | | 5 |
| 32527 5 | 1/2 | 17 | 50 | | 5 |

For machine-operated nut driver inserts.



7204 Power hex nut driver, 1/4" drive.

Material: High-quality chrome-molybdenum steel, through-hardened, phosphate coated surface.
Drive: DIN 3129, ISO 2725-2.
Application: For tightening and loosening hex screws with electric or pneumatic screwdrivers (rotary or impact screwdrivers).
Extra: Rounded hex opening in the corners for protection of the screw heads.

| Order-No. | Ø | Ø | Ø | Ø | Ø |
|-----------|------|------|----|----|---|
| 32531 2 | 5.5 | 9.4 | 13 | 23 | 1 |
| 32532 9 | 6 | 10.0 | 13 | 23 | 1 |
| 32533 6 | 7 | 11.3 | 13 | 23 | 1 |
| 32534 3 | 8 | 12.5 | 13 | 23 | 1 |
| 32535 0 | 10 | 15.0 | 13 | 23 | 1 |
| 32536 7 | 12 | 17.5 | 13 | 23 | 1 |
| 32537 4 | 13 | 18.8 | 13 | 23 | 1 |
| 32538 1 | 1/4 | 10.0 | 13 | 23 | 1 |
| 32539 8 | 5/16 | 12.5 | 13 | 23 | 1 |
| 32540 4 | 3/8 | 15.0 | 13 | 23 | 1 |



7204M Power hex nut driver with magnet, 1/4" drive.

Material: High-quality chrome-molybdenum steel, through-hardened, phosphate coated surface.
Drive: DIN 3129, ISO 2725-2.
Application: Mainly for fastening and unfastening in self-tapping sheet metal screws with electric or pneumatic screwdrivers (rotary or impact screwdrivers). The magnet simplifies the guidance of the screws while fastening. With a powerful permanent magnet incorporated in brass.
Extra: With 0.03 mm raised cladding in comparison to the standard model for a considerably increased service life. Due to the rounded hex opening, flat screws can easily be gripped.

| Order-No. | Ø | Ø | Ø | Ø | Ø |
|-----------|-----|------|----|----|---|
| 32541 1 | 7 | 11.6 | 13 | 23 | 1 |
| 32542 8 | 8 | 12.8 | 13 | 25 | 1 |
| 32543 5 | 10 | 15.3 | 13 | 28 | 1 |
| 32544 2 | 13 | 19.1 | 13 | 30 | 1 |
| 32545 9 | 1/4 | 10.3 | 13 | 23 | 1 |



7205 Power nut driver insert: TORX®, 1/4" insert.

Material: High-quality chrome-molybdenum steel, through-hardened, phosphate coated surface.
Drive: DIN 3129.
Application: For external TORX® screws and self-tapping screws with TORX® head. Suitable for electric or pneumatic screwdrivers (rotary or impact screwdrivers).

| Order-No. | Ø | Ø | Ø | Ø | Ø |
|-----------|-----|------|----|----|---|
| 32550 3 | E6 | 8.7 | 13 | 23 | 1 |
| 32551 0 | E8 | 9.2 | 13 | 23 | 1 |
| 32552 7 | E10 | 12.2 | 13 | 23 | 1 |

Wiha nut driver product line.

The entire line for hand and machine use.

For machine-operated nut driver inserts.



7241Z Power connection piece with ball.

Standards: External square drive in accordance with DIN 3120.

Material: High-quality chrome vanadium alloy steel, through-hardened, phosphate coated surface.

Drive: DIN 3126, ISO 1173, style E 6.3.

Application: For use with machine-operated nut drivers.

| Order-No. | Drive | Length | Weight | Quantity |
|-----------|-------|--------|--------|----------|
| 32508 4 | 1/4 | 1/4 | 35 | 5 |
| 32509 1 | 1/4 | 1/4 | 50 | 5 |
| 32510 7 | 1/4 | 1/4 | 100 | 5 |
| 32511 4 | 3/8 | 1/4 | 50 | 5 |
| 32512 1 | 1/2 | 1/4 | 60 | 5 |



24633 Power universal joint with ball (machine operation).

Material: High-quality chrome-molybdenum steel, through-hardened, phosphate coated surface.

Drive: DIN 3121.

Application: Makes working in hard-to-reach places easier in connection with machine-operated nut drivers.

Extra: 1/4" insert with ball and joint.

| Order-No. | Drive | Length | Weight | Quantity |
|-----------|-------|--------|--------|----------|
| 32553 4 | 1/4 | 1/4 | 75 | 1 |



24634 Power extension piece.

Material: High-quality chrome-molybdenum steel, through-hardened, phosphate coated surface.

Drive: DIN 3121.

Application: Extension for machine-operated nut driver.

Extra: 1/4" insert.

| Order-No. | Drive | Length | Weight | Quantity |
|-----------|-------|--------|--------|----------|
| 32554 1 | 1/4 | 1/4 | 75 | 1 |

For machine-operated nut driver inserts.



7204Z Bit insert: Bit holder.

Material: High-quality chrome-molybdenum steel, through-hardened, phosphate coated surface.

Drive: DIN 3126.

Application: For use of C 6.3 bits.

| Order-No. | Drive | Length | Weight | Quantity |
|-----------|-------|--------|--------|----------|
| 32546 6 | 1/4 | 1/4 | 36 | 1 |
| 32548 0 | 1/4 | 3/8 | 40 | 1 |
| 32549 7 | 1/4 | 1/2 | 48 | 1 |



7204K39 Complete nut driver and bit set for hand and machine use, 37 pcs.

Content:

Hand use:
 24630 ratchets, 1/4" with SoftFinish® handle
 24632 T-handle
 24635 universal joint
 24637 bit holder for C 6.3 bits
 7011Z PH1, PH2, PH3
 7012Z PZ1, PZ2, PZ3
 7015Z T10, T15, T20, T25, T30
 28101 Stubby with magnet

Machine use:
 7244M with magnet, size 6, 8, 10
 7241Z connection piece, 50 mm
 24634 extension piece
 72050 TORX® nut driver E6, E8, E10
 72040 hex nut driver, size 5.5, 6, 7, 8, 10, 12, 13 mm
 7204Z bit holder for E 6.3 bits
 7045Z T10, T15, T20, T25, T30

| Order-No. | Series | Quantity |
|-----------|---------|----------|
| 32818 4 | 7204K39 | 1 |

For hand used nut driver sockets.



7044 Standard bit, socket-wrench insert, style E 6.3.

Material: High grade chrome-vanadium steel, through hardened.

Drive: DIN 3126, ISO 1173, style E 6.3.

Application: For all types of screw applications in trade and industry.

| Order-No. | Drive | Length | Weight |
|-----------|-------|--------|--------|
| 04514 2 | 5.0 | 55 | 5 |
| 04513 5 | 5.5 | 55 | 5 |
| 04512 8 | 6.0 | 55 | 5 |
| 04511 1 | 7.0 | 55 | 5 |
| 04510 4 | 8.0 | 55 | 5 |
| 04509 8 | 10.0 | 55 | 5 |
| 04508 1 | 13.0 | 55 | 5 |
| 04515 9 | 1/4 | 55 | 5 |
| 04516 6 | 5/16 | 55 | 5 |
| 04517 3 | 3/8 | 55 | 5 |




7044 M Standard bit, nut driver insert, magnetic, style E 6.3.

Application: For a secure hold on screws.

Extra: With strong permanent magnet.

| Order-No. | Drive | Length | Weight |
|-----------|-------|--------|--------|
| 04637 8 | 5.0 | 55 | 5 |
| 04636 1 | 5.5 | 55 | 5 |
| 04635 4 | 6.0 | 55 | 5 |
| 04634 7 | 7.0 | 55 | 5 |
| 04633 0 | 8.0 | 55 | 5 |
| 04632 3 | 10.0 | 55 | 5 |
| 04631 6 | 13.0 | 55 | 5 |
| 04638 5 | 1/4 | 55 | 5 |
| 04639 2 | 5/16 | 55 | 5 |
| 04640 8 | 3/8 | 55 | 5 |



24632 T-handle.

Material: High-quality chrome-molybdenum steel, through-hardened, chrome-plated and polished.

Drive: DIN 3120.

Application: For hand used nut driver sockets.

| Order-No. | Drive | Length | Weight |
|-----------|-------|--------|--------|
| 32557 2 | 1/4 | 115 | 1 |



24635 Universal joint (hand operation).

Material: High-quality chrome-molybdenum steel, through-hardened, chrome-plated and polished.

Drive: DIN 3123.

Application: For working in hard-to-reach places with hand-operated nut drivers.

Extra: Easier joint operation.

| Order-No. | Drive | Length | Weight |
|-----------|-------|--------|--------|
| 32555 8 | 1/4 | 1/4 | 33 |

For hand used nut driver sockets.



24630 Ratchets with SoftFinish® handle.

Design: Ratchet wheel with 20 teeth, extremely smooth-running and resilient. With proven Wiha SoftFinish® multi-component handle for more safety when working.

Material: High-quality chrome-molybdenum steel, through-hardened, chrome-plated and polished.

Drive: DIN 3122, style D 6.3.

Application: For hand-operated nut driver inserts.

Extra: The locking button ensures secure holding of the nut driver and quick release of the attached tool.

| Order-No. | Drive | Length | Weight |
|-----------|-------|--------|--------|
| 32629 6 | 1/4 | 140 | 1 |



24631 Ratchets with joint and SoftFinish® handle.

Design: Ratchet wheel with 20 teeth, extremely smooth-running and resilient. With proven Wiha SoftFinish® multi-component handle for more safety when working.

Material: High-quality chrome-molybdenum steel, through-hardened, chrome-plated and polished.

Drive: DIN 3122, style D 6.3.

Application: The articulated head makes working in hard-to-reach places with nut drivers easier.

Extra: The locking button ensures secure holding of the nut driver and quick release of the attached tool.

| Order-No. | Drive | Length | Weight |
|-----------|-------|--------|--------|
| 32630 2 | 1/4 | 165 | 1 |



24637 Bit insert: Bit holder.

Material: High-quality chrome-molybdenum steel, through-hardened, chrome-plated and polished.

Drive: DIN 3126.

Application: For use of C 6.3 bits.

| Order-No. | Drive | Length | Weight |
|-----------|-------|--------|--------|
| 33230 3 | 1/4 | 1/4 | 22 |

Wiha adapters.

For hand used nut driver sockets.



7210 Tool shaft, style C 6.3.
 Suitable for: DIN 3120, ISO 1174, style A 6.3 + A 10.
 Drive: DIN 3126, ISO 1173, style C 6.3.
 Application: For hand used nut driver sockets.

| Order-No. | ⌀ | ⌀: | mm | mm |
|-----------|-----|-----|----|----|
| 01933 4 | 1/4 | 1/4 | 25 | 5 |
| 04204 2 | 3/8 | 1/4 | 30 | 5 |



7201 Connecting device with retaining ring, style G 6.3 + G 10 + G 12.5.
 Suitable for: DIN 3126, ISO 1173, style D 6.3 and D 8.
 Drive: DIN 3121, ISO 1174, style G 6.3 + G 10 + G 12.5.
 Application: Suitable for bits C 6.3 and C 8.

| Order-No. | ⌀ | ⌀: | mm | mm | mm |
|-----------|------|-----|----|-------|----|
| 01924 2 | 1/4 | 1/4 | 25 | D 6.3 | 2 |
| 01926 6 | 1/4 | 3/8 | 30 | D 6.3 | 2 |
| 01922 8 | 1/4 | 1/2 | 35 | D 6.3 | 2 |
| 01927 3 | 5/16 | 3/8 | 30 | D 8 | 2 |
| 01923 5 | 5/16 | 1/2 | 35 | D 8 | 2 |

For hand used nut driver sockets.



7230 Tool shaft, style A 5.5.
 Standards: Adapter DIN 7428.
 Suitable for: DIN 3121, ISO 1174, style F 6.3.
 Drive: DIN 3126, ISO 1173, style A 5.5.
 Application: For machine used nut driver sockets.

| Order-No. | ⌀ | ⌀: | mm | mm |
|-----------|-----|-----|----|----|
| 01934 1 | 1/4 | 5.5 | 50 | 5 |



7240 Tool shaft, style E 6.3.
 Standards: Adapter DIN 7428.
 Suitable for: DIN 3121, ISO 1174, style F 6.3 and F 10.
 Drive: DIN 3126, ISO 1173, style E 6.3.
 Application: For machine used nut driver sockets.

| Order-No. | ⌀ | ⌀: | mm | mm |
|-----------|-----|-----|-----|----|
| 04685 9 | 1/4 | 1/4 | 100 | 5 |
| 01935 8 | 1/4 | 1/4 | 50 | 5 |
| 04684 2 | 3/8 | 1/4 | 100 | 5 |
| 04362 9 | 3/8 | 1/4 | 50 | 5 |



7280 Tool shaft, style G 7.
 Suitable for: DIN 3121, ISO 1174, style F 6.3.
 Drive: DIN 3126, ISO 1173, style G 7.
 Application: For machine used nut driver sockets.

| Order-No. | ⌀ | ⌀: | mm | mm |
|-----------|-----|----|----|----|
| 01936 5 | 1/4 | 7 | 75 | 5 |

Wiha impact screwdriver assortment.

The complete range.

Impact screwdriver and bits.



7050 5/16" impact screwdriver bits, slotted.
 Material: High-quality chrome-molybdenum steel, through-hardened, phosphate coated surface.
 Drive: DIN 3126, ISO 1173, style C 8.
 Application: For slotted screws for use in impact screwdrivers.
 Extra: Especially impact-resistant.

| Order-No. | ⌀ | ⌀: | mm | mm | mm |
|-----------|----|-----|------|----|----|
| 32561 9 | 9 | 1.6 | 5/16 | 32 | 5 |
| 32562 6 | 11 | 1.6 | 5/16 | 32 | 5 |
| 32563 3 | 14 | 2.0 | 5/16 | 32 | 5 |



7051 5/16" impact screwdriver bits, Phillips.
 Material: High-quality chrome-molybdenum steel, through-hardened, phosphate coated surface.
 Drive: DIN 3126, ISO 1173, style C 8.
 Application: For Phillips screws for use in impact screwdrivers.
 Extra: Especially impact-resistant.

| Order-No. | ⊕ | ⌀ | mm | mm | mm |
|-----------|-----|------|----|----|----|
| 32558 9 | PH2 | 5/16 | 32 | 5 | 5 |
| 32559 6 | PH3 | 5/16 | 32 | 5 | 5 |
| 32560 2 | PH4 | 5/16 | 32 | 5 | 5 |



7055 5/16" impact screwdriver bits, TORX®.
 Material: High-quality chrome-molybdenum steel, through-hardened, phosphate coated surface.
 Drive: DIN 3126, ISO 1173, style C 8.
 Application: For TORX® screws for use in impact screwdrivers.
 Extra: Especially impact-resistant.

| Order-No. | ⊛ | ⌀ | mm | mm | mm |
|-----------|-----|------|----|----|----|
| 32564 0 | T30 | 5/16 | 32 | 5 | 5 |
| 32565 7 | T40 | 5/16 | 32 | 5 | 5 |
| 32566 4 | T45 | 5/16 | 32 | 5 | 5 |
| 32567 1 | T50 | 5/16 | 32 | 5 | 5 |

Impact screwdriver and bits.



24636 Hand impact screwdriver.
 Material: High-quality chrome-molybdenum steel, through-hardened, with hand protection.
 Drive: Square 1/2".
 Application: For loosening jammed screws or nuts together with the Wiha 5/16" impact bits and holder.
 Extra: The insert is hardened and lacquered at the impact end to prevent the chipping of chrome parts or mushroom-shaped deformations.

| Order-No. | ⌀ | mm | mm |
|-----------|-----|-----|----|
| 32556 5 | 1/2 | 163 | 1 |



7204Z Bit insert: Bit holder.
 Material: High-quality chrome-molybdenum steel, through-hardened, chrome-plated and polished.
 Drive: DIN 3120.
 Application: For use of C 8 bits.
 Required for use with hand impact screwdriver, series 24636.

| Order-No. | ⌀ | ⌀: | mm | mm |
|-----------|------|-----|----|----|
| 32547 3 | 5/16 | 1/2 | 38 | 1 |



24636 B5 5/16" impact screwdriver bit set.
 Material: High-quality chrome-molybdenum steel, through-hardened, with hand protection.
 Drive: For 1/2" nuts, also suitable for 5/16" bits with adapter.
 Application: Set for loosening jammed screws or nuts with the Wiha 5/16" impact bits and holder.
 Extra: The insert is hardened and lacquered at the impact end to prevent the chipping of chrome parts or mushroom-shaped deformations.

| Order-No. | Series | mm |
|-----------|----------|-------------------------|
| 32573 2 | 24636 B5 | 1 |
| ⊕ | 24636 | Hand impact screwdriver |
| ⊕ | 7050 | 9x1.6 11x1.6 |
| ⊕ | 7051 | PH2x5/16 PH3x5/16 |
| ⊕ | 7204Z | Bit holder |

Wiha Gripper.

Siezes everything.

Gripper.



9246 01 Gripper nut driver 3/8".

Material: Housing made from alloyed steel.
54 spring-loaded hardened steel pins.

Drive: DIN 3120, style C 10.

Application: Replaces nuts from 7 mm to 19 mm.
Regardless of whether inch or metric dimensions.
The 54 steel pins fit every nut or screw with an external profile.
For screws up to a height of 8 mm.

Extra: The Gripper also works on hooks or eyebolts.
Enables a torque transmission of up to 80 Nm.

| Order-No. | 3/8 | 25.4 | 53.5 | 10 |
|-----------|-----|------|------|----|
| 09400 3 | | | | |



SB 246 01 Gripper nut driver, 3/8" blister packed.

Material: Housing made from alloyed steel.
54 spring-loaded hardened steel pins.

Suitable for: DIN 3120, style C 10.

Packaging: Blister packed.

Application: Replaces nuts from 7 mm to 19 mm.
Regardless of whether inch or metric dimensions.
The 54 steel pins fit every nut or screw with an external profile.
For screws up to a height of 8 mm.

Extra: The Gripper also works on hooks or eyebolts.
Enables a torque transmission of up to 80 Nm.

| Order-No. | 3/8 | 25.4 | 53.5 | 10 |
|-----------|-----|------|------|----|
| 20554 6 | | | | |

Gripper compact set.



SB 246 02 Gripper compact set, 3 pcs.

Consists of Gripper nut driver, ratchet 3/8" and adapter for portable electric drills.

Material: Housing made from alloyed steel.
54 spring-loaded hardened steel pins.

Drive: DIN 3120, style C 10.

Packaging: Blister packed.

Content: Gripper nut driver 3/8"
Ratchet 3/8"
Adapter 3/8"

Application: Replaces nuts from 7 mm to 19 mm.
Regardless of whether inch or metric dimensions.
The 54 steel pins fit every nut or screw with an external profile.
For screws up to a height of 8 mm.

Extra: The Gripper also works on hooks or eyebolts.
Enables a torque transmission of up to 80 Nm.

| Order-No. | Series | |
|-----------|-----------|-------------------------|
| 20783 0 | SB 246 02 | 1 |
| | 9246 01 | Gripper nut driver 3/8" |
| | 246 05 | Ratchet 3/8" |
| | 246 03 | Adapter 3/8" |

Wiha CentroFix.

One for all.



CentroFix, the star of the Wiha bit holders. It convinces with an unbelievable diversity of application. With its innovative mechanism this bit holder holds all common bit types with 1/4" hex drive.

The holding mechanism was newly developed especially for bits from the CentroFix system series (drill bits, catalogue pages 137-139). The result is optimised rotation characteristics and reduced play between bit and holder.

In addition the CentroFix quick release holder enables distinctly easier work for all craftsmen and handymen. Because especially on ladders or scaffolding, the CentroFix quick release holder offers added safety and time-saving with real single-handed operation for quick bit changing.



The CentroFix quick-release holder makes work much easier for all professionals and semi-professionals.



Push sleeve forward.



Take out bit.



Insert new bit.



Push sleeve back.

Wiha CentroFix.

- Fits all bits with 1/4" hex drive with styles C6.3 and E6.3
- Real one-hand application for quick bit change
- The play between bit and holder is reduced to a minimum, particularly important when drilling
- Guarantees high retention forces, necessary when drilling wood
- Slender metal corpus with ergonomically styled, functional sleeve withstands even the greatest stresses when driving screws and drilling

Wiha bit holder for power machines.

Drive system style E 6.3.



NEW

7148CM CentroFix quick release holder, magnetic, style E 6.3.

Sleeve: Metal, coated.
 Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3 and E 6.3.
 Drive: DIN 3126, ISO 1173, style E 6.3.
 Packaging: Plastic box, reusable and dust repellent.
 Application: Whenever the bit needs a secure and zero-play hold. Optimised for the use of drill bits.
 Extra: Due to the special holding mechanism, this bit holder holds all types of bits with 1/4" hex drive. The play between bit and holder is reduced to a minimum. Real single-handed operation for fast bit exchange.

| Order-No. | 1/4 | 1/4 | 60 | 10 |
|-----------|-----|-----|----|----|
| 35386 5 | | | | |



7148C CentroFix quick release holder, style E 6.3.

Sleeve: Metal, coated.
 Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3 and E 6.3.
 Drive: DIN 3126, ISO 1173, style E 6.3.
 Packaging: Plastic box, reusable and dust repellent.
 Application: Whenever the bit needs a secure and zero-play hold. Optimised for the use of drill bits.
 Extra: Due to the special holding mechanism, this bit holder holds all types of bits with 1/4" hex drive. The play between bit and holder is reduced to a minimum. Real single-handed operation for fast bit exchange.

| Order-No. | 1/4 | 1/4 | 60 | 10 |
|-----------|-----|-----|----|----|
| 32477 3 | | | | |



7149 ClicFix quick release holder, magnetic, style E 6.3.

Sleeve: Aluminium anodized.
 Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
 Drive: DIN 3126, ISO 1173, style E 6.3.
 Application: For applications where the bit must be held tight e.g. assembly lines.
 Extra: Real single-handed operation for fast bit exchange.

| Order-No. | 1/4 | 1/4 | 60 | 10 |
|-----------|-----|-----|----|----|
| 24770 6 | | | | |

Drive system style E 6.3.



7140 Universal holder, with retaining ring, style E 6.3.

Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
 Drive: DIN 3126, ISO 1173, style E 6.3.
 Application: For applications where the bit must be held tight e.g. assembly lines.
 Extra: One piece construction.


| Order-No. | 1/4 | 1/4 | 57 | 10 |
|-----------|-----|-----|----|----|
| 01910 5 | | | | |



7110M Universal holder, magnetic, style E 6.3.

Suitable for: For bits according to DIN 3126, ISO 1173 style C 4.
 Drive: DIN 3126, ISO 1173, style E 6.3.
 Application: Suitable for 4 mm bits, e.g. Wiha 7000-7005 series.
 Extra: With magnet.

| Order-No. | C4 | 1/4 | 60 | 10 |
|-----------|----|-----|----|----|
| 32505 3 | | | | |



7142 Universal holder, magnetic/retaining ring, style E 6.3.

Sleeve: Copper beryllium.
 Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
 Drive: DIN 3126, ISO 1173, style E 6.3.
 Application: Copper-beryllium alloys prevent ignitable sparks and reduce the danger of explosion. Tools made of copper-beryllium are often use in potentially explosive areas.

| Order-No. | 1/4 | 1/4 | 73 | 10 |
|-----------|-----|-----|----|----|
| 01912 9 | | | | |



7143 Universal holder, magnetic/retaining ring, style E 6.3.

Sleeve: Stainless steel.
 Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
 Drive: DIN 3126, ISO 1173, style E 6.3.
 Application: For applications where the bit must be held tight e.g. assembly lines.

| Order-No. | 1/4 | 1/4 | 72 | 10 |
|-----------|-----|-----|----|----|
| 01913 6 | | | | |


Drive system style E 6.3, G 7 and SDS-Plus®.



7113 Universal holder, magnetic, style E 6.3.

Sleeve: Stainless steel.
 Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
 Drive: DIN 3126, ISO 1173, style E 6.3.

| Order-No. | 1/4 | 1/4 | 74 | 10 |
|-----------|-----|-----|----|----|
| 01894 8 | | | | |



7113 S Universal holder, magnetic, style E 6.3.

Sleeve: Stainless steel.
 Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
 Drive: DIN 3126, ISO 1173, style E 6.3.

| Order-No. | 1/4 | 1/4 | 58 | 10 |
|-----------|-----|-----|----|----|
| 01895 5 | | | | |



7183 Universal holder, magnetic/retaining ring, style G 7.

Sleeve: Stainless steel.
 Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
 Drive: DIN 3126, ISO 1173, style G 7.
 Application: For applications where the bit must be held tight e.g. assembly lines.

| Order-No. | 1/4 | G7 | 72 | 10 |
|-----------|-----|----|----|----|
| 01919 8 | | | | |



NEW 7180-7 Quick release holder, magnetic, SDS-Plus®.

Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
 Drive: SDS-Plus®.
 Application: For SDS-Plus® chuck.
 Extra: All hammer drills become powerful screwdrivers with this bit holder.

| Order-No. | 1/4 | SDS-Plus® | 100 | 10 |
|-----------|-----|-----------|-----|----|
| 26255 6 | | | | |

Offset screwdriver.



57 Nm

SB24628 High-performance offset screwdriver with a 105° angled head.

Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3 and E 6.3.
 Material: Steel housing, matte gold-plated.
 Application: For use in almost any (battery-powered) screwdriver; ideal for drilling and fastening/ unfastening in hard-to-reach places, corners and edges.
 Extra: A hand-operated locking sleeve ensures an optimal hold of all 1/4" inserts such as bits, drill bits and countersink bits. Stabilisation arm, adjustable in 48 positions; torque transmission up to 57 Nm. Compact, slim design.

| Order-No. | 1/4 | 1/4 | 165 | 1 |
|-----------|-----|-----|-----|---|
| 32310 3 | | | | |



14 Nm

SB24629 Offset screwdriver with a 105° angled head, magnetic.

Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3 and E 6.3.
 Material: Die cast housing, matte gold-plated.
 Application: For use in battery-powered and hand-held screwdrivers; ideal for drilling and fastening in hard-to-reach places, corners and edges.
 Extra: Stabilisation arm, adjustable in 12 positions; torque transmission up to 14 Nm. Compact, slim design.

| Order-No. | 1/4 | 1/4 | 130 | 1 |
|-----------|-----|-----|-----|---|
| 32311 0 | | | | |

Wiha bit holder with handle.

Bit holder 1/4".



384 Bit holder with handle, magnetic, 1/4".

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
 Handle: Wiha SoftFinish® multi-component handle with roll-off protection.
 Bit holder: Stainless steel with strong magnet.
 Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.

| Order-No. | Ø | → | → | → | → |
|-----------|-----|-----|-----|----|----|
| 01475 9 | 1/4 | 125 | 225 | 36 | 10 |
| 01476 6 | 1/4 | 300 | 400 | 36 | 5 |



386 Bit holder with handle, flexible shaft, 1/4".

Blade: Plastic coated flexible metal.
 Handle: Wiha SoftFinish® multi-component handle with roll-off protection.
 Bit holder: With retaining ring.
 Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
 Application: For offset screws.

| Order-No. | Ø | → | → | → | → |
|-----------|-----|-----|-----|----|----|
| 01479 7 | 1/4 | 150 | 268 | 36 | 10 |



387 Bit holder with handle, quick release holder, 1/4".

Handle: Wiha SoftFinish® multi-component handle with roll-off protection.
 Bit holder: ClicFix quick release holder, magnetic.
 Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
 Application: Compact, handy style for working in confined spaces. For applications where the bit must be held tight.

| Order-No. | Ø | → | → | → | → |
|-----------|-----|----|-----|----|----|
| 25874 0 | 1/4 | 35 | 146 | 30 | 10 |



281-02 Bit holder with handle, magnetic, 1/4".

Handle: Wiha SoftFinish® multi-component handle with roll-off protection.
 Bit holder: Stainless steel with strong magnet.
 Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3 and E 6.3.
 Application: Compact screwdriver together with bits, 1/4". Together with Wiha countersink bits, can be used as manual deburrer.

| Order-No. | Ø | → | → | → | → |
|-----------|-----|-----|----|---|---|
| 32160 4 | 1/4 | 125 | 36 | | 1 |

Bit holder 1/4".



281 01 Bit holder with handle, magnetic, 1/4".

Handle: Ergonomic Wiha Stubby SoftFinish® handle, multi-component with roll-off protection.
 Bit holder: Stainless steel with strong magnet.
 Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
 Application: For working in confined spaces.
 Extra: Together with Wiha countersink bits, can be used as manual deburrer.

| Order-No. | Ø | → | → | → | → |
|-----------|-----|----|----|---|----|
| 29463 2 | 1/4 | 57 | 34 | | 10 |



388 Bit holder with handle, magnetic, 1/4".

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
 Handle: Wiha T-handle.
 Bit holder: Stainless steel with strong magnet.
 Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
 Application: For high torques.

| Order-No. | Ø | → | → | → | → |
|-----------|-----|-----|----|---|----|
| 01481 0 | 1/4 | 150 | 80 | | 10 |



388DS Bit holder with handle, magnetic, 1/4".

Blade: Chrome-vanadium steel, through hardened, nickel-plated.
 Handle: Wiha ComfortGrip multi-component T-handle.
 Bit holder: Stainless steel with strong magnet.
 Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
 Application: For high torques.
 Extra: Two bit holders for 1/4" bits make this a universal tool. Bit holder on the side for particularly high torque.

| Order-No. | Ø | → | → | → | → |
|-----------|-----|-----|-----|---|----|
| 26179 5 | 1/4 | 150 | 100 | | 10 |

Wiha magazine bit holder.

Everything in the palm of your hand.




reddot design award
best of the best 2008



The Wiha magazine bit holder is ideal for all users needing several screw or screwdriver types for work within a short space of time. Thanks to its compact size it fits into every toolbox. The ergonomically designed handle of soft, skin-friendly material guarantees comfortable handling as well. This new solution for storing and extracting bits has already convinced juries of experts, winning the coveted "red dot design award: best of the best".

Small format – great professional quality: the Wiha Stubby magazine bit holder features a clever magazine for accommodating six bits. With the short-length, ergonomic Wiha SoftFinish® multi-component handle it allows comfortable working in confined places.

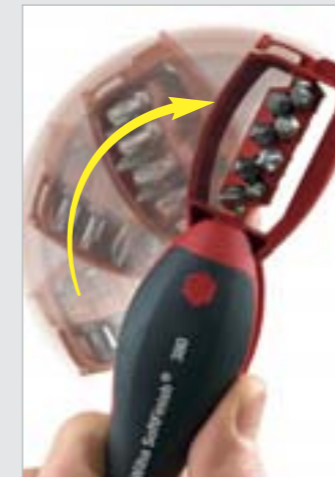

The bit magazine accommodated by the handle is swung open with a light press of the thumb. The bits can then be quickly and simply changed.



Handy, compact and particularly suitable for working in confined spaces.

Wiha magazine bit holder.

- Unique fold-out mechanism
- Eight screwdrivers in one – for timesaving, effective working
- Magnetic fixing function
- Ergonomic SoftFinish® zone
- Handy & compact

Wiha magazine bit holder Stubby.

- Gets everywhere
- Has six bits in the cap
- Fits perfectly in your hand
- Professional quality Made in Germany
- Ideal for professional work in confined spaces

Wiha magazine bit holder.

Eight screwdrivers in one.

Magazine bit holder 1/4", magnetic.



38090101 Magazine bit holder, magnetic, 1/4".
 Blade: High grade chrome-vanadium steel, through hardened.
 Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
 Bit holder: Stainless steel with strong magnet.
 Suitable for: DIN 3126, ISO 1173, style D 6.3.
 Bits: 25 mm Standard bits.
 Application: The alternative to a screwdriver set.
 Eight drive shapes in one screwdriver.

| Order-No. | Series | |
|-----------|----------|-------------------|
| 32901 3 | 38090101 | 5 |
| ⓪ | 7010 Z | 1x6.5 |
| ⊕ | 7011 Z | 1xPH1 1xPH2 1xPH3 |
| ⊕ | 7012 Z | 1xPZ2 |
| ⊕ | 7015 Z | 1xT15 1xT20 1xT25 |

SB 38090101 Magazine bit holder, magnetic, 1/4".
 Blister packed.

| Order-No. | Series | |
|-----------|-------------|---|
| 33007 1 | SB 38090101 | 5 |



38090101 VH Magazine bit holder, display, 10 pcs.
 Sales display made of card with integrated rear panel.

| Order-No. | Series-No. | Content | |
|-----------|-------------|---------------|-----------|
| 33244 0 | 38090101 VH | 10 x 38090101 | ⓪ ⊕ ⊕ ⊕ 1 |
| 33245 7 | 38090102 VH | 10 x 38090102 | ⊕ 1 |
| 33246 4 | 38090103 VH | 10 x 38090103 | ⓪ ⊕ 1 |
| 33247 1 | 38090104 VH | 10 x 38090104 | ⓪ ⊕ 1 |

Magazine bit holder 1/4", magnetic.



38090102 Magazine bit holder, magnetic, 1/4".

| Order-No. | Series | |
|-----------|----------|--|
| 32902 0 | 38090102 | 5 |
| ⊕ | 7015 Z | 1xT6 1xT8 1xT10 1xT15 1xT20 1xT25 1xT30 1xT40 |

SB 38090102 Magazine bit holder, magnetic, 1/4".
 Blister packed.

| Order-No. | Series | |
|-----------|-------------|--|
| 33008 8 | SB 38090102 | 5 |
| ⊕ | 7015 Z | 1xT6 1xT8 1xT10 1xT15 1xT20 1xT25 1xT30 1xT40 |



38090103 Magazine bit holder, magnetic, 1/4".

| Order-No. | Series | |
|-----------|----------|-------------------|
| 32903 7 | 38090103 | 5 |
| ⓪ | 7010 Z | 1x5,5 1x6,5 |
| ⊕ | 7011 Z | 1xPH1 3xPH2 2xPH3 |

SB 38090103 Magazine bit holder, magnetic, 1/4".
 Blister packed.

| Order-No. | Series | |
|-----------|-------------|-------------------|
| 33009 5 | SB 38090103 | 5 |
| ⓪ | 7010 Z | 1x5,5 1x6,5 |
| ⊕ | 7011 Z | 1xPH1 3xPH2 2xPH3 |



38090104 Magazine bit holder, magnetic, 1/4".

| Order-No. | Series | |
|-----------|----------|-------------------|
| 32904 4 | 38090104 | 5 |
| ⓪ | 7010 Z | 1x5,5 1x6,5 |
| ⊕ | 7012 Z | 1xPZ1 3xPZ2 2xPZ3 |

SB 38090104 Magazine bit holder, magnetic, 1/4".
 Blister packed.

| Order-No. | Series | |
|-----------|-------------|-------------------|
| 33010 1 | SB 38090104 | 5 |
| ⓪ | 7010 Z | 1x5,5 1x6,5 |
| ⊕ | 7012 Z | 1xPZ1 3xPZ2 2xPZ3 |

Wiha magazine bit holder Stubby.

The Stubby with six bits in its cap.

Magazine bit holder 1/4", magnetic.



380101 Magazine bit holder Stubby, magnetic, 1/4".
 Handle: Ergonomic Wiha SoftFinish® multi-component handle with roll-off protection.
 Bit holder: Stainless steel with strong magnet.
 Suitable for: DIN 3126, ISO 1173, style D 6.3.
 Bits: 25 mm Standard bits.
 Application: The alternative to a screwdriver set.
 Six drive shapes in one screwdriver.
 For working in confined spaces.

| Order-No. | Series | |
|-----------|--------|-------------------|
| 33736 0 | 380101 | 10 |
| ⓪ | 7010 Z | 1x4.5 1x6.5 1x8.0 |
| ⊕ | 7011 Z | 1xPH1 1xPH2 1xPH3 |

SB 380101 Magazine bit holder Stubby, magnetic, 1/4".
 Blister packed.

| Order-No. | Series | |
|-----------|-----------|-------------------|
| 33738 4 | SB 380101 | 10 |
| ⓪ | 7010 Z | 1x4.5 1x6.5 1x8.0 |
| ⊕ | 7011 Z | 1xPH1 1xPH2 1xPH3 |



380101 VH Magazine bit holder Stubby, display, 10 pcs.
 Sales display made of card with integrated rear panel.

| Order-No. | Series-No. | Content | |
|-----------|------------|-------------|-------|
| 33739 1 | 380101 VH | 10 x 380101 | ⓪ ⊕ 1 |
| 33742 1 | 380102 VH | 10 x 380102 | ⊕ ⊕ 1 |
| 33745 2 | 380103 VH | 10 x 380103 | ⊕ 1 |
| 33747 6 | 380104 VH | 10 x 380104 | ⓪ ⊕ 1 |

Magazine bit holder 1/4", magnetic.



380102 Magazine bit holder Stubby, magnetic, 1/4".

| Order-No. | Series | |
|-----------|--------|-------------------|
| 33740 7 | 380102 | 10 |
| ⊕ | 7011 Z | 1xPH1 1xPH2 1xPH3 |
| ⊕ | 7012 Z | 1xPZ1 1xPZ2 1xPZ3 |

SB 380102 Magazine bit holder Stubby, magnetic, 1/4".
 Blister packed.

| Order-No. | Series | |
|-----------|-----------|-------------------|
| 33741 4 | SB 380102 | 10 |
| ⊕ | 7011 Z | 1xPH1 1xPH2 1xPH3 |
| ⊕ | 7012 Z | 1xPZ1 1xPZ2 1xPZ3 |



380103 Magazine bit holder Stubby, magnetic, 1/4".

| Order-No. | Series | |
|-----------|--------|--|
| 33743 8 | 380103 | 10 |
| ⊕ | 7015 Z | 1xT10 1xT15 1xT20 1xT25 1xT30 1xT40 |

SB 380103 Magazine bit holder Stubby, magnetic, 1/4".
 Blister packed.

| Order-No. | Series | |
|-----------|-----------|--|
| 33744 5 | SB 380103 | 10 |
| ⊕ | 7015 Z | 1xT10 1xT15 1xT20 1xT25 1xT30 1xT40 |



380104 Magazine bit holder Stubby, magnetic, 1/4".

| Order-No. | Series | |
|-----------|--------|-------------------|
| 33764 3 | 380104 | 10 |
| ⓪ | 7010 Z | 1x4.5 1x6.5 1x8.0 |
| ⊕ | 7012 Z | 1xPZ1 1xPZ2 1xPZ3 |

SB 380104 Magazine bit holder Stubby, magnetic, 1/4".
 Blister packed.

| Order-No. | Series | |
|-----------|-----------|-------------------|
| 33746 9 | SB 380104 | 10 |
| ⓪ | 7010 Z | 1x4.5 1x6.5 1x8.0 |
| ⊕ | 7012 Z | 1xPZ1 1xPZ2 1xPZ3 |

Wiha XSelector and XLSelector.

Couldn't be smaller!



The range of Wiha bit selectors is distinguished by incredible compactness and ingeniously simple bit removal.

With the new 31-piece XLSelector and the 11-piece XSelector, Wiha offers an optimum range that has been tailored to user requirements.

The proven colour-coding system facilitates identification of the various bit qualities.



The XLSelector is extremely flat and compact and fits in every case.



The Wiha XSelector: bit removal couldn't be easier.

Protector with System Loop: for attaching the 11-piece XSelector to a belt or for wall-mounting.



Wiha XLSelector.

- Extremely flat and compact bit box, stocked with 30 bits and bit holder
- Bit box with soft zones for a non-slip grip and comfortable handling
- Removal of the bits couldn't be easier
- With dimensions of just 135 x 80 x 17.5 mm, it even fits into a shirt or trouser pocket
- Due to its compactness, it's ideal for storing in a toolbox



Wiha XSelector.

- Compact, smart, tidy!
- Equipped with 10 bits and bit holder
- Ingeniously simple bit removal via integrated bit clamp
- With dimensions of just 75 x 53 x 15 mm, it fits in every shirt or trouser pocket
- Together with the Protector, can be attached to a belt

Wiha XLSelector.

Couldn't be smaller: for 25 mm bits.

ZOT Torsion and Security bits.



7948-047 XLSelector Torsion, mixed, 31 pcs.

Housing: Box made of high quality plastic. The simplest bit removal guaranteed.

Bits: 25 mm ZOT Torsion and Standard bits.

Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.

Holder: ClicFix quick release holder, magnetic.

Application: Especially suitable for fastenings in metal and hard materials – it can't get any more compact!

Extra: Soft zones for maximum working comfort.

| Order-No. | Series | | | | | | |
|-----------|---|-------|-------|-------|-------|-------|-------|
| 29415 1 | 7948-047 | 5 | | | | | |
| ⓪ | 7010 ZOT | 1x5.5 | 1x6.5 | 1x8.0 | | | |
| ⊕ | 7011 ZOT | 2xPH1 | 5xPH2 | 2xPH3 | | | |
| ⊕ | 7012 ZOT | 2xPZ1 | 5xPZ2 | 2xPZ3 | | | |
| ⊙ | 7013 Z | 1x4.0 | 1x5.0 | 1x6.0 | | | |
| ⊙ | 7015 ZOT | 1xT10 | 1xT15 | 1xT20 | 1xT25 | 1xT30 | 1xT40 |
| 7149 | ClicFix quick release holder, magnetic, style E 6.3 | | | | | | |



7948-927 XLSelector Standard, Security, 31 pcs.

Housing: Box made of high quality plastic. The simplest bit removal guaranteed.

Bits: 25 mm ZOT Torsion and Standard bits.

Holder: ClicFix quick release holder, magnetic.

Application: All types of fastenings for trade and industry – it can't get any more compact!

Extra: Soft zones for maximum working comfort. Bits for popular security screws.

| Order-No. | Series | | | | | | |
|-----------|---|---------|---------|---------|---------|---------|---------|
| 29416 8 | 7948-927 | 5 | | | | | |
| ⓪ | 7019 ZOT TW | 1x0 | 1x1 | 1x2 | 1x3 | 1x4 | |
| ⊕ | 7019 Z SP | 1x4 | 1x6 | 1x8 | 1x10 | | |
| ⊙ | 7013 Z TR | 1xTR2.0 | 1xTR2.5 | 1xTR3.0 | 1xTR4.0 | 1xTR5.0 | 1xTR6.0 |
| ⊕ | 7019 ZOT TS | 1x6 | 1x8 | 1x10 | | | |
| ⊙ | 7015 Z TR | 1xT8H | 1xT9H | 1xT10H | 1xT15H | 1xT20H | |
| ⊙ | 7018 Z | 1xT25H | 1xT27H | 1xT30H | 1xT40H | | |
| 7149 | ClicFix quick release holder, magnetic, style E 6.3 | | | | | | |

HOT Torsion and Standard bits.



7948-005 XLSelector Standard, mixed, 31 pcs.

Housing: Box made of high quality plastic. The simplest bit removal guaranteed.

Bits: 25 mm Standard bits.

Holder: Universal holder, magnetic.

Application: All types of fastenings for trade and industry – it can't get any more compact!

Extra: Soft zones for maximum working comfort.

| Order-No. | Series | | | | | | |
|-----------|---|-------|-------|-------|-------|-------|-------|
| 29417 5 | 7948-005 | 5 | | | | | |
| ⓪ | 7010 Z | 1x4.5 | 1x5.5 | 1x6.5 | | | |
| ⊕ | 7011 Z | 2xPH1 | 4xPH2 | 1xPH3 | | | |
| ⊕ | 7012 Z | 2xPZ1 | 5xPZ2 | 1xPZ3 | | | |
| ⊙ | 7015 Z | 2xT10 | 2xT15 | 2xT20 | 3xT25 | 2xT30 | 1xT40 |
| 7113 S | Universal holder, magnetic, style E 6.3 | | | | | | |



7948-255 XLSelector Torsion/ Standard, mixed, 31 pcs.

Housing: Box made of high quality plastic. The simplest bit removal guaranteed.

Bits: 25 mm HOT Torsion and Standard bits.

Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.

Holder: Universal holder, magnetic.

Application: Especially suitable for fastenings in wood and soft materials – it can't get any more compact!

Extra: Soft zones for maximum working comfort. Extra hard Wiha HOT Torsion bits for optimum wear properties with soft screw applications, ideal for turning screws in wood.

| Order-No. | Series | | | | | | |
|-----------|---|-------|--------|-------|-------|-------|-------|
| 29418 2 | 7948-255 | 5 | | | | | |
| ⊕ | 7012 HOT | 3xPZ1 | 10xPZ2 | 2xPZ3 | | | |
| ⊙ | 7015 Z | 2xT10 | 2xT15 | 3xT20 | 4xT25 | 2xT30 | 2xT40 |
| 7113 S | Universal holder, magnetic, style E 6.3 | | | | | | |

Wiha XLSelector.

Couldn't be smaller: for 25 and 50 mm bits.

Inkra and Standard bits.



7948-92801 XLSelector, Standard, mixed, 21 pcs.

Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.

Bits: 50 mm Inkra bits and 25 mm Standard bits.

Holder: CentroFix quick release holder, magnetic, style E 6.3.

Application: All types of fastenings for trade and industry – it can't get any more compact!

Extra: Soft zones for maximum working comfort.

| Order-No. | Series | | | | | | | |
|-----------|------------|---|-------|-------|-------|-------|-------|---|
| 33664 6 | 7948-92801 | | | | | | | 5 |
| + | 7011 Z | 1xPH1 | 1xPH2 | 1xPH3 | | | | |
| + | 7012 Z | 1xPZ1 | 1xPZ2 | 1xPZ3 | | | | |
| + | 7015 Z | 1xT10 | 1xT15 | 2xT20 | 1xT25 | 1xT30 | 1xT40 | |
| + | 7041 Inkra | 1xPH1 | 1xPH2 | 1xPH3 | | | | |
| + | 7042 Inkra | 1xPZ1 | 1xPZ2 | 1xPZ3 | | | | |
| ⊖ | 7010 Z | 1x6.5 | | | | | | |
| | 7148C | CentroFix quick release holder, style E 6.3 | | | | | | |



7948-0502 XLSelector, Standard, TORX®, 21 pcs.

Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.

Bits: 25 mm and 50 mm Standard bits.

Holder: CentroFix quick release holder, magnetic, style E 6.3.

Application: All types of fastenings for trade and industry – it can't get any more compact!

Extra: Soft zones for maximum working comfort The TORX® ball end enables fastening and unfastening at an angle of up to 25°.

| Order-No. | Series | | | | | | | |
|-----------|-----------|---|--------|--------|--------|-------|-------|---|
| 32803 0 | 7948-0502 | | | | | | | 5 |
| + | 7045BE | 1xT10 | 1xT15 | 1xT20 | 1xT25 | 1xT30 | 1xT40 | |
| + | 7015TT | 1xT15 | 1xT20 | 1xT25 | 1xT30 | | | |
| + | 7015 Z TR | 1xT15H | 2xT20H | 2xT25H | 1xT30H | | | |
| + | 7016 Z | 1x15IP | 1x20IP | 1x25IP | 1x30IP | | | |
| | 7148C | CentroFix quick release holder, style E 6.3 | | | | | | |

ZOT Torsion and Standard bits.



7948-0501 XLSelector, Standard, TORX® ball end, 13 pcs.

Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.

Bits: 50 mm TORX® ball end Standard bits.

Holder: CentroFix quick release holder, magnetic, style E 6.3.

Application: All types of fastenings for trade and industry – it can't get any more compact!

Extra: Soft zones for maximum working comfort.
The TORX® ball end enables fastening and unfastening at an angle of up to 25°.

| Order-No. | Series | | | | | | | | |
|-----------|-----------|---|-------|-------|-------|-------|-------|-------|-------|
| 32802 3 | 7948-0501 | | | | | | | 5 | |
| + | 7045BE | 1xT9 | 1xT10 | 2xT15 | 2xT20 | 2xT25 | 1xT27 | 2xT30 | 1xT40 |
| | 7148C | CentroFix quick release holder, style E 6.3 | | | | | | | |



7948-928 XLSelector, Torsion, mixed, 13 pcs.

Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.

Bits: 50 mm ZOT Torsion bits.

Holder: CentroFix quick release holder, magnetic, style E 6.3.

Application: Especially suitable for fastenings in metal and hard materials – it can't get any more compact!

Extra: Soft zones for maximum working comfort.

| Order-No. | Series | | | | | | | |
|-----------|----------|---|-------|-------|-------|-------|-------|---|
| 33663 9 | 7948-928 | | | | | | | 5 |
| + | 7041 ZOT | 1xPH1 | 1xPH2 | 1xPH3 | | | | |
| + | 7042 ZOT | 1xPZ1 | 1xPZ2 | 1xPZ3 | | | | |
| + | 7045 Z | 1xT10 | 1xT15 | 1xT20 | 1xT25 | 1xT30 | 1xT40 | |
| | 7148C | CentroFix quick release holder, style E 6.3 | | | | | | |

Wiha XSelector.

Couldn't be smaller!

DuraBits with torsion zone.



7944-0DR7 XSelector Dura, mixed, 11 pcs.

Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.

Bits: 25 mm DuraBits with torsion zone.
Extremely wear-resistant Dura tip with hard-metal coating grips into the screw head and prevents the bit from slipping.

Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.

Coating: Hard-metal coating, extremely wear-resistant.

Holder: ClicFix quick release holder, magnetic.

Application: Bits for fatigue-free, safe work in demanding industrial applications and for sensitive surfaces – it can't get any more compact!

| Order-No. | Series | | | | |
|-----------|-----------|---|-------|-------|----|
| 26974 6 | 7944-0DR7 | | | | 10 |
| ⊖ | 7010 DR | 1x5.5 | 1x6.5 | | |
| + | 7011 DR | 1xPH1 | 2xPH2 | 1xPH3 | |
| + | 7012 DR | 1xPZ1 | 2xPZ2 | 1xPZ3 | |
| | 7149 | ClicFix quick release holder, magnetic, style E 6.3 | | | |



7944-9DR7 XSelector Dura, mixed, 11 pcs.

Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.

Bits: 25 mm DuraBits with torsion zone.
Extremely wear-resistant Dura tip with hard-metal coating grips into the screw head and prevents the bit from slipping.

Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.

Coating: Hard-metal coating, extremely wear-resistant.

Holder: ClicFix quick release holder, magnetic.

Application: Bits for fatigue-free, safe work in demanding industrial applications and for sensitive surfaces – it can't get any more compact!

| Order-No. | Series | | | | | | | |
|-----------|-----------|---|-------|-------|-------|-------|--|----|
| 26975 3 | 7944-9DR7 | | | | | | | 10 |
| + | 7012 DR | 1xPZ1 | 2xPZ2 | 2xPZ3 | | | | |
| + | 7015 DR | 1xT15 | 1xT20 | 1xT25 | 1xT30 | 1xT40 | | |
| | 7149 | ClicFix quick release holder, magnetic, style E 6.3 | | | | | | |

SB7944-9DR7 XSelector Dura, mixed, 11 pcs.

Blister packed for hanging.

| Order-No. | Series | | | | | | | |
|-----------|-------------|--|--|--|--|--|--|----|
| 27001 8 | SB7944-9DR7 | | | | | | | 10 |

Diamond bits and TiN Torsion bits.



7944-0D7 XSelector Diamond, mixed, 11 pcs.

Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.

Bits: 25 mm Diamond Torsion bits.

Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.

Coating: Extremely wear-resistant diamond-sapphire coating with a long service life.

Holder: ClicFix quick release holder, magnetic.

Application: Bits for fatigue-free work; bits ideal for frequent fastening – it can't get any more compact!

| Order-No. | Series | | | | |
|-----------|----------|---|-------|-------|----|
| 26976 0 | 7944-0D7 | | | | 10 |
| ⊖ | 7010 D | 1x5.5 | 1x6.5 | | |
| + | 7011 D | 1xPH1 | 2xPH2 | 1xPH3 | |
| + | 7012 D | 1xPZ1 | 2xPZ2 | 1xPZ3 | |
| | 7149 | ClicFix quick release holder, magnetic, style E 6.3 | | | |



7944-065 XSelector TiN, mixed, 11 pcs.

Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.

Bits: 25 mm TiN Torsion bits.

Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.

Coating: TiN coating, extends the tool life.

Holder: Universal holder, magnetic.

Application: Bits for trade and industry, especially with series connections – it can't get any more compact!

| Order-No. | Series | | | | |
|-----------|----------|---|-------|-------|----|
| 26977 7 | 7944-065 | | | | 10 |
| ⊖ | 7010 TiN | 1x5.5 | 1x6.5 | | |
| + | 7011 TiN | 1xPH1 | 2xPH2 | 1xPH3 | |
| + | 7012 TiN | 1xPZ1 | 2xPZ2 | 1xPZ3 | |
| | 7113 S | Universal holder, magnetic, style E 6.3 | | | |

SB7944-065 XSelector TiN, mixed, 11 pcs.

Blister packed for hanging.

| Order-No. | Series | | | | | | | |
|-----------|------------|--|--|--|--|--|--|----|
| 27003 2 | SB7944-065 | | | | | | | 10 |

Wiha XSelector.

Couldn't be smaller!

ZOT Torsion bits.



7944-045 XSelector Torsion, mixed, 11 pcs.

Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.

Bits: 25 mm ZOT Torsion bits.

Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.

Holder: Universal holder, magnetic.

Application: Especially suitable for fastenings in metal and hard materials – it can't get any more compact!

| Order-No. | Series | | |
|-----------|----------|---|----|
| 26978 4 | 7944-045 | | 10 |
| ⊖ | 7010 ZOT | 1x5.5 1x6.5 | |
| ⊕ | 7011 ZOT | 1xPH1 2xPH2 1xPH3 | |
| ⊗ | 7012 ZOT | 1xPZ1 2xPZ2 1xPZ3 | |
| | 7113 S | Universal holder, magnetic, style E 6.3 | |

SB7944-045 XSelector Torsion, mixed, 11 pcs.

Blister packed for hanging.

| Order-No. | Series | | |
|-----------|------------|--|----|
| 27004 9 | SB7944-045 | | 10 |



7944-145 XSelector Torsion, Phillips, 11 pcs.

Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.

Bits: 25 mm ZOT Torsion bits.

Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.

Holder: Universal holder, magnetic.

Application: Especially suitable for fastenings in metal and hard materials – it can't get any more compact!

| Order-No. | Series | | |
|-----------|----------|---|----|
| 26979 1 | 7944-145 | | 10 |
| ⊕ | 7011 ZOT | 2xPH1 6xPH2 2xPH3 | |
| | 7113 S | Universal holder, magnetic, style E 6.3 | |

ZOT Torsion bits and HOT Torsion bits.



7944-245 XSelector Torsion, Pozidriv, 11 pcs.

Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.

Bits: 25 mm ZOT Torsion bits.

Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.

Holder: Universal holder, magnetic.

Application: Especially suitable for fastenings in metal and hard materials – it can't get any more compact!

| Order-No. | Series | | |
|-----------|----------|---|----|
| 26980 7 | 7944-245 | | 10 |
| ⊕ | 7012 ZOT | 2xPZ1 6xPZ2 2xPZ3 | |
| | 7113 S | Universal holder, magnetic, style E 6.3 | |

SB7944-245 XSelector Torsion, Pozidriv, 11 pcs.

Blister packed for hanging.

| Order-No. | Series | | |
|-----------|------------|--|----|
| 27006 3 | SB7944-245 | | 10 |



7944-055 XSelector Torsion, mixed, 11 pcs.

Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.

Bits: 25 mm HOT Torsion bits.

Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.

Holder: Universal holder, magnetic.

Application: Especially suitable for fastenings in wood and soft materials – it can't get any more compact!

| Order-No. | Series | | |
|-----------|----------|---|----|
| 29412 0 | 7944-055 | | 10 |
| ⊖ | 7010 HOT | 1x5.5 1x6.5 | |
| ⊕ | 7011 HOT | 1xPH1 2xPH2 1xPH3 | |
| ⊗ | 7012 HOT | 1xPZ1 2xPZ2 1xPZ3 | |
| | 7113 S | Universal holder, magnetic, style E 6.3 | |

Standard bits.



7944-005 XSelector Standard, mixed, 11 pcs.

Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.

Bits: 25 mm Standard bits.

Holder: Universal holder, magnetic.

Application: All types of fastenings for trade and industry – it can't get any more compact!

| Order-No. | Series | | |
|-----------|----------|---|----|
| 26982 1 | 7944-005 | | 10 |
| ⊖ | 7010 Z | 1x5.5 1x6.5 | |
| ⊕ | 7011 Z | 1xPH1 2xPH2 1xPH3 | |
| ⊗ | 7012 Z | 1xPZ1 2xPZ2 1xPZ3 | |
| | 7113 S | Universal holder, magnetic, style E 6.3 | |

SB7944-005 XSelector Standard, mixed, 11 pcs.

Blister packed for hanging.

| Order-No. | Series | | |
|-----------|------------|--|----|
| 27008 7 | SB7944-005 | | 10 |



7944-505 XSelector Standard, TORX®, 11 pcs.

Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.

Bits: 25 mm Standard bits.

Holder: Universal holder, magnetic.

Application: All types of fastenings for trade and industry – it can't get any more compact!

| Order-No. | Series | | |
|-----------|----------|---|----|
| 26983 8 | 7944-505 | | 10 |
| ⊗ | 7015 Z | 1xT7 1xT8 1xT9 1xT10 1xT15 1xT20 1xT25 1xT27 1xT30 1xT40 | |
| | 7113 S | Universal holder, magnetic, style E 6.3 | |

SB7944-505 XSelector Standard, TORX®, 11 pcs.

Blister packed for hanging.

| Order-No. | Series | | |
|-----------|------------|--|----|
| 27009 4 | SB7944-505 | | 10 |

Standard bits.



7944-505TR XSelector Standard, TORX® H, 11 pcs.

Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.

Bits: 25 mm Standard bits.

Suitable for TORX® Tamper Resistant security screws.

Holder: Universal holder, magnetic.

Application: All types of fastenings for trade and industry – it can't get any more compact!

| Order-No. | Series | | |
|-----------|------------|---|----|
| 26984 5 | 7944-505TR | | 10 |
| ⊗ | 7015 Z TR | 1xT7H 1xT8H 1xT9H 1xT10H 1xT15H 1xT20H 1xT25H 1xT27H 1xT30H 1xT40H | |
| | 7113 S | Universal holder, magnetic, style E 6.3 | |

SB7944-505TR XSelector Standard, TORX® H, 11 pcs.

Blister packed for hanging.

| Order-No. | Series | | |
|-----------|--------------|--|----|
| 27010 0 | SB7944-505TR | | 10 |



7944-904 XSelector Standard, mixed, 11 pcs.

Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.

Bits: 25 mm Standard bits.

Holder: Universal holder, magnetic.

Application: All types of fastenings for trade and industry – it can't get any more compact!

| Order-No. | Series | | |
|-----------|----------|---|----|
| 26985 2 | 7944-904 | | 10 |
| ⊕ | 7011 Z | 1xPH1 1xPH2 1xPH3 | |
| ⊗ | 7012 Z | 1xPZ1 1xPZ2 1xPZ3 | |
| ⊗ | 7015 Z | 1xT15 1xT20 1xT25 1xT30 | |
| | 7113 S | Universal holder, magnetic, style E 6.3 | |

SB7944-904 XSelector Standard, mixed, 11 pcs.

Blister packed for hanging.

| Order-No. | Series | | |
|-----------|------------|--|----|
| 27011 7 | SB7944-904 | | 10 |



Wiha XSelector.

Couldn't be smaller!

Standard bits.



7944-905 XSelector Standard, mixed, 11 pcs.

Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.

Bits: 25 mm Standard bits.

Holder: Universal holder, magnetic.

Application: All types of fastenings for trade and industry – it can't get any more compact!

| Order-No. | Series | |
|-----------|----------|---|
| 26986 9 | 7944-905 | 10 |
| + | 7012 Z | 1xPZ1 2xPZ2 2xPZ3 |
| + | 7015 Z | 1xT15 1xT20 1xT25 1xT30 1xT40 |
| | 7113 S | Universal holder, magnetic, style E 6.3 |

SB7944-905 XSelector Standard, mixed, 11 pcs. Blister packed for hanging.

| Order-No. | Series | |
|-----------|------------|----|
| 27012 4 | SB7944-905 | 10 |



7944-906 XSelector Standard, mixed, 11 pcs.

Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.

Bits: 25 mm Standard bits.

Holder: Universal holder, magnetic.

Application: All types of fastenings for trade and industry – it can't get any more compact!

| Order-No. | Series | |
|-----------|----------|---|
| 26987 6 | 7944-906 | 10 |
| + | 7011 Z | 1xPH1 2xPH2 2xPH3 |
| + | 7015 Z | 1xT15 1xT20 1xT25 1xT30 1xT40 |
| | 7113 S | Universal holder, magnetic, style E 6.3 |

SB7944-906 XSelector Standard, mixed, 11 pcs. Blister packed for hanging.

| Order-No. | Series | |
|-----------|------------|----|
| 27013 1 | SB7944-906 | 10 |

Standard bits.



7944-902 XSelector Standard, hex, 9 pcs.

Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.

Bits: 25 mm Standard bits.

Holder: Universal holder, magnetic.

Application: All types of fastenings for trade and industry – it can't get any more compact!

Extra: With hex bits up to size 8 mm.

| Order-No. | Series | |
|-----------|----------|--|
| 27157 2 | 7944-902 | 10 |
| + | 7013 Z | 1x1.5 1x2.0 1x2.5 1x3.0 1x4.0 1x5.0 1x6.0 1x8.0 |
| | 7113 S | Universal holder, magnetic, style E 6.3 |



7944-995 XSelector Standard, SIT, 11 pcs.

Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.

Bits: 25 mm SIT bits.

Holder: Universal holder, magnetic.

Application: All types of fastenings for trade and industry – it can't get any more compact!

Extra: With bits to fit ASSY® and Pias screws.

| Order-No. | Series | |
|-----------|------------|---|
| 27321 7 | 7944-995 | 10 |
| + | 7019 Z SIT | 2xSIT 10 3xSIT 20 2xSIT 25 2xSIT 30 1xSIT 40 |
| | 7113 S | Universal holder, magnetic, style E 6.3 |

Wiha XSelector and XLSelector.

Couldn't be smaller!

Inkra bits.



7944-015 XSelector Inkra, mixed, 11 pcs.

Housing: Box made of high quality plastic.
The simplest bit removal guaranteed.

Bits: 25 mm Inkra bits.

Holder: Turning screws is easy, even if screwdriver is at an angle.
Universal holder, magnetic.

Application: The ideal bits for all hard-to-reach places, especially suitable for wood screws – it can't get any more compact!

| Order-No. | Series | |
|-----------|------------|---|
| 26988 3 | 7944-015 | 10 |
| + | 7011 Inkra | 1xPH1 3xPH2 1xPH3 |
| + | 7012 Inkra | 1xPZ1 3xPZ2 1xPZ3 |
| | 7113 S | Universal holder, magnetic, style E 6.3 |

SB7944-015 XSelector Inkra, mixed, 11 pcs. Blister packed for hanging.

| Order-No. | Series | |
|-----------|------------|----|
| 27014 8 | SB7944-015 | 10 |




7944 Protector with System-Loop. Customised holder for the XSelector.

Material: High quality, impact resistant plastic.

Application: For wall mounting or as a belt attachment when combined with the System Loop.

| Order-No. | | |
|-----------|--|----|
| 27026 1 | | 10 |

TEST WINNING BITS



Im Test:
17 Bit-Sets
mit unterschiedlichen
Bit-Sorten
Phillips / Pozidriv
Ausgabe
2/2007

Sales counter display XSelector and XLSelector.



7948 VB1 XLSelector Standard, display. 6 XLSelectors 7948-005.

| Order-No. | | |
|-----------|------------------------|---|
| 29541 7 | 6 XLSelectors 7948-005 | |
| ⓪ | 7010 Z | 1x4.5 1x5.5 1x6.5 |
| + | 7011 Z | 2xPH1 4xPH2 1xPH3 |
| + | 7012 Z | 2xPZ1 5xPZ2 1xPZ3 |
| + | 7015 Z | 2xT10 2xT15 2xT20 3xT25 2xT30 1xT40 |
| | 7113 S | Universal holder, magnetic, style E 6.3 |



7944 VB5 XSelector Standard, display. 12 XSelectors 7944-005.

| Order-No. | | |
|-----------|------------------------|---|
| 27048 3 | 12 XSelectors 7944-005 | |
| ⓪ | 7010 Z | 1x5.5 1x6.5 |
| + | 7011 Z | 1xPH1 2xPH2 1xPH3 |
| + | 7012 Z | 1xPZ1 2xPZ2 1xPZ3 |
| | 7113 S | Universal holder, magnetic, style E 6.3 |

Wiha Collector.

Everything in one box.



A completely new look, and outstandingly equipped: the new Wiha Collector sets standards for convenient application of the bits.

The first impression convinces: the box is compact, solid and surprises with an innovative opening mechanism. The Collector opens up like a book with the easy-to-use button. The bits are clearly laid out, easy to remove and yet so firmly held that they cannot fall out if the box is accidentally knocked over. And talking of bits: the assortment is designed perfectly for all applications. Whether for special work in safety areas or for everyday tasks in trade and industry, the Wiha Collector is ready and waiting.



Versatile: for up to 60 bits as well as universal and quick release holders.



Innovative opening, and lots of space: the new Collector.



Wiha Collector.

- **Tough**
Compact form, tough polycarbonate
- **Easy to open**
With practical unlocking button – for when only one hand is free
- **Lots of space**
30 premium bits with bit holder and hand-held screwdriver or 60 premium bits with bit holder
- **Diverse**
Security bits or tried-and-true Standard bits for all applications
- **Optimal seating of bits**
Easy to remove and yet still firmly held

Security-bits.



NEW

7928-928 Bit Collector Security, mixed, 27 pcs.

Housing: Robust box of high quality plastic with innovative opening mechanism.
Handle: Wiha SoftFinish® multi-component handle, magnetic, with 1/4" bit mount.
Bits: 25 mm Standard bits and Torsion bits, TORX® Tamper Resistant, Tri-Wing®, Torq-Set®, Spanner, hex Tamper Resistant.
Holder: Universal holder, magnetic.
Application: Bit cassette with bits for all popular security screws.

| Order-No. | Series | | | | | |
|-----------|-------------|---|----------|----------|---------|---|
| 09393 8 | 7928-928 | | | | | 5 |
| ⊕ | 7015 Z TR | 1xT8H | 1xT10H | 1xT15H | 1xT20H | |
| | | 1xT25H | 1xT27H | 1xT30H | 1xT40H | |
| ⊕ | 7019 ZOT TS | 1x6 | 1x8 | 1x10 | | |
| ⊕ | 7019 ZOT TW | 1x1 | 1x2 | 1x3 | 1x4 | |
| ⊕ | 7019 Z SP | 1x4 | 1x6 | 1x8 | 1x10 | |
| ⊕ | 7013 Z TR | 1xTR5/64 | 1xTR3/32 | 1xTR7/64 | 1xTR1/8 | |
| | | 1xTR9/64 | 1xTR5/32 | | | |
| | 7113 S | Universal holder, magnetic, style E 6.3 | | | | |
| | 281-02 | Bit holder with handle, magnetic, 1/4" | | | | |

Standard bits.



NEW

7928-913 Bit Collector Standard, mixed, 32 pcs.

Housing: Robust box of high quality plastic with innovative opening mechanism.
Handle: Wiha SoftFinish® multi-component handle, magnetic, with 1/4" bit mount.
Bits: 25 mm Standard bits.
Holder: ClicFix quick release holder, magnetic.
Application: Can be used immediately for both machine and hand operation with handle and bit holder.

| Order-No. | Series | | | | | |
|-----------|----------|---|-------|-------|-------|---|
| 34686 7 | 7928-913 | | | | | 5 |
| ⊕ | 7010 Z | 1x4.5 | 1x5.5 | 1x6.5 | | |
| ⊕ | 7011 Z | 2xPH1 | 5xPH2 | 2xPH3 | | |
| ⊕ | 7012 Z | 2xPZ1 | 5xPZ2 | 2xPZ3 | | |
| ⊕ | 7015 Z | 1xT10 | 1xT15 | 1xT20 | 1xT25 | |
| | | 1xT30 | 1xT40 | | | |
| ⊕ | 7013 Z | 1x4.0 | 1x5.0 | 1x6.0 | | |
| | 7149 | ClicFix quick release holder, magnetic, style E 6.3 | | | | |
| | 281-02 | Bit holder with handle, magnetic, 1/4" | | | | |



NEW

7928-923 Bit Collector Standard, mixed, 61 pcs.

Housing: Robust box of high quality plastic with innovative opening mechanism.
Bits: 25 mm Standard bits.
Holder: ClicFix quick release holder, magnetic.
Application: The complete assortment for every professional.

| Order-No. | Series | | | | | |
|-----------|----------|---|--------|-------|-------|---|
| 07943 7 | 7928-923 | | | | | 5 |
| ⊕ | 7010 Z | 1x4.5 | 1x5.5 | 1x6.5 | 1x8.0 | |
| ⊕ | 7011 Z | 7xPH1 | 13xPH2 | 3xPH3 | | |
| ⊕ | 7012 Z | 7xPZ1 | 13xPZ2 | 3xPZ3 | | |
| ⊕ | 7015 Z | 1xT10 | 1xT15 | 1xT20 | 1xT25 | |
| | | 1xT30 | 1xT40 | | | |
| ⊕ | 7013 Z | 1x3.0 | 1x4.0 | 1x5.0 | 1x6.0 | |
| | 7149 | ClicFix quick release holder, magnetic, style E 6.3 | | | | |

Wiha bit cassette and bulk packs.

Bit cassette.



7979-01 Standard bit case, mixed, 31 pcs.

Housing: Practical, rugged plastic box.
Bits: 25 mm Standard bits.
Holder: Universal holder, magnetic.

| Order-No. | Series | | | | | | |
|-----------|---------|---|-------|-------|-------|-------|-------|
| 26252 5 | 7979-01 | 6 | | | | | |
| ⊕ | 7010 Z | 1x4.5 | 1x5.5 | 1x6.5 | | | |
| ⊕ | 7011 Z | 2xPH1 | 6xPH2 | 1xPH3 | | | |
| ⊕ | 7012 Z | 2xPZ1 | 6xPZ2 | 1xPZ3 | | | |
| ⊕ | 7015 Z | 1xT10 | 1xT15 | 1xT20 | 1xT25 | 1xT30 | 1xT40 |
| ⊕ | 7013 Z | 1x4,0 | 1x5,0 | 1x6,0 | | | |
| | 7113 S | Universal holder, magnetic, style E 6.3 | | | | | |



7979-02 Standard bit case, mixed, 31 pcs.

Housing: Practical, rugged plastic box.
Bits: 25 mm Standard bits.
Holder: Universal holder, magnetic.

| Order-No. | Series | | | | | | |
|-----------|---------|---|--------|-------|-------|-------|-------|
| 26253 3 | 7979-02 | 6 | | | | | |
| ⊕ | 7012 Z | 5xPZ1 | 10xPZ2 | 3xPZ3 | | | |
| ⊕ | 7015 Z | 2xT10 | 2xT15 | 2xT20 | 2xT25 | 2xT30 | 2xT40 |
| | 7113 S | Universal holder, magnetic, style E 6.3 | | | | | |

Bit bulk pack TiN.



7929 TiN Bit bulk pack TiN, 25 mm, 50 pcs.

Packaging: Practical cardboard box. Can be used as a dispenser in the workplace.
Bits: 25 mm TiN Torsion bits. Unmixed, available in the standard Phillips, Pozidriv and TORX® sizes.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Coating: Titanium nitride for extended tool life.
Application: Especially for professional needs.

| Order-No. | Content | Quantity | |
|-----------|----------|----------|----------|
| 08053 2 | 7011 TiN | 50 | PH1 x 25 |
| 08054 9 | 7011 TiN | 50 | PH2 x 25 |
| 08055 6 | 7011 TiN | 50 | PH3 x 25 |
| 08062 4 | 7012 TiN | 50 | PZ1 x 25 |
| 08063 1 | 7012 TiN | 50 | PZ2 x 25 |
| 08064 8 | 7012 TiN | 50 | PZ3 x 25 |
| 33672 1 | 7015 TiN | 50 | T10 x 25 |
| 33673 8 | 7015 TiN | 50 | T15 x 25 |
| 33674 5 | 7015 TiN | 50 | T20 x 25 |
| 33675 2 | 7015 TiN | 50 | T25 x 25 |
| 33676 9 | 7015 TiN | 50 | T30 x 25 |

Bit bulk pack HOT.



7929 HOT Bit bulk pack HOT, 25 mm, 50 pcs.

Packaging: Practical cardboard box. Can be used as a dispenser in the workplace.
Bits: 25 mm HOT Torsion bits. Unmixed, available in the standard Phillips, Pozidriv and TORX® sizes.
Geometry: Torsion zone for protecting against premature breakage of bits under load.
Application: Especially for professional needs.

| Order-No. | Content | Quantity | |
|-----------|----------|----------|----------|
| 08050 1 | 7011 HOT | 50 | PH1 x 25 |
| 08051 8 | 7011 HOT | 50 | PH2 x 25 |
| 08052 5 | 7011 HOT | 50 | PH3 x 25 |
| 08059 4 | 7012 HOT | 50 | PZ1 x 25 |
| 08060 0 | 7012 HOT | 50 | PZ2 x 25 |
| 08061 7 | 7012 HOT | 50 | PZ3 x 25 |
| 33677 6 | 7015 HOT | 50 | T20 x 25 |
| 33678 3 | 7015 HOT | 50 | T25 x 25 |
| 33679 0 | 7015 HOT | 50 | T30 x 25 |

Bit bulk pack ZOT.



7929 ZOT Bit bulk pack ZOT, 25 mm, 50 pcs.

Packaging: Practical cardboard box. Can be used as a dispenser in the workplace.
Bits: 25 mm ZOT Torsion bits. Unmixed, available in the standard Phillips and Pozidriv sizes.
Geometry: Patented torsion zone to prevent premature breaking of the bit when under stress.
Application: Especially for professional needs.

| Order-No. | Content | Quantity | |
|-----------|----------|----------|----------|
| 29875 3 | 7011 ZOT | 50 | PH1 x 25 |
| 29876 0 | 7011 ZOT | 50 | PH2 x 25 |
| 29877 7 | 7011 ZOT | 50 | PH3 x 25 |
| 29878 4 | 7012 ZOT | 50 | PZ1 x 25 |
| 29879 1 | 7012 ZOT | 50 | PZ2 x 25 |
| 29880 7 | 7012 ZOT | 50 | PZ3 x 25 |

Bit bulk pack Inkra.



7929 Inkra Bit bulk pack Inkra, 25 mm, 50 pcs.

Packaging: Practical cardboard box. Can be used as a dispenser in the workplace.
Bits: 25 mm Inkra bits. Unmixed, available in the standard Phillips and Pozidriv sizes.
Geometry: The ideal bit for areas that are difficult to access, particularly suitable for wood screws.
Coating: Non-corrosive coating.
Application: Especially for professional needs.

| Order-No. | Content | Quantity | |
|-----------|------------|----------|----------|
| 31990 8 | 7011 Inkra | 50 | PH1 x 25 |
| 31991 5 | 7011 Inkra | 50 | PH2 x 25 |
| 31992 2 | 7011 Inkra | 50 | PH3 x 25 |
| 31993 9 | 7012 Inkra | 50 | PZ1 x 25 |
| 31994 6 | 7012 Inkra | 50 | PZ2 x 25 |
| 31995 3 | 7012 Inkra | 50 | PZ3 x 25 |

Bit bulk pack Standard.



7929 Z Bit bulk pack Standard, 25 mm, 50 pcs.

Packaging: Practical cardboard box. Can be used as a dispenser in the workplace.
Bits: 25 mm Standard bits. Unmixed, available in the standard Phillips, Pozidriv and TORX® sizes.
Application: Especially for professional needs.

| Order-No. | Content | Quantity | |
|-----------|---------|----------|----------|
| 08047 1 | 7011 Z | 50 | PH1 x 25 |
| 08048 8 | 7011 Z | 50 | PH2 x 25 |
| 08049 5 | 7011 Z | 50 | PH3 x 25 |
| 08056 3 | 7012 Z | 50 | PZ1 x 25 |
| 08057 0 | 7012 Z | 50 | PZ2 x 25 |
| 08058 7 | 7012 Z | 50 | PZ3 x 25 |
| 08065 5 | 7015 Z | 50 | T10 x 25 |
| 08066 2 | 7015 Z | 50 | T15 x 25 |
| 08067 9 | 7015 Z | 50 | T20 x 25 |
| 08068 6 | 7015 Z | 50 | T25 x 25 |
| 29544 8 | 7015 Z | 50 | T27 x 25 |
| 08069 3 | 7015 Z | 50 | T30 x 25 |
| 08070 9 | 7015 Z | 50 | T40 x 25 |

Wiha SB bit programme.

Full programme range in outstanding quality.



You can display the bits effectively in the practical Wiha plastic boxes.

The bits are easily recognisable in the dust-repellent, transparent packaging. In addition, the labels provide all necessary information and at the same time ensure protection against theft. Contents, EAN code, article number and order number – everything can be seen at a glance with the large-format symbols.

A comprehensive range: the Wiha SB bit range includes more than 100 different articles.



Wiha SB bit programme.

- Full-surface label with viewing window allows a view of box contents
- Large, clearly laid out presentation of quality, size and quantity
- Reusable plastic box
- Full assortment
- Slotted, Phillips, Pozidriv, hexagonal and TORX® outputs, various bit holders and tool shafts
- In qualities Dura, Diamond, TiN, HOT, ZOT, Inkra and Standard
- 1-pc, 2-pcs, 3-pcs, 6-pcs and 10-pcs

Style C 6.3 (1/4").



701 Slotted bits 25 mm, in plastic box.
Packaging: Plastic box, reusable and dust repellent.
Extra: Easily identifiable content with large symbols.

| Order-No. | Content | Quantity | |
|------------------------------|----------|----------|---|
| Wiha DuraBit | | | |
| 24713 3 | 7010 DR | 3 | ① 4,5x25 5,5x25 6,5x25 |
| Wiha TiN Torsions bit | | | |
| 08455 4 | 7010 TiN | 3 | ① 4,5x25 5,5x25 6,5x25 |
| Wiha ZOT Torsions bit | | | |
| 08454 7 | 7010 ZOT | 3 | ① 4,5x25 5,5x25 6,5x25 |
| 09496 6 | 7010 ZOT | 6 | ① 5,5x25 6,5x25 ⊕ PH1x25 PH2x25 ⊕ PZ1x25 PZ2x25 |
| Wiha Standard bit | | | |
| 07863 8 | 7010 Z | 2 | ① 4,5x25 5,5x25 |
| 07864 5 | 7010 Z | 2 | ① 6,5x25 8,0x25 |
| 08453 0 | 7010 Z | 3 | ① 4,5x25 5,5x25 6,5x25 |
| 09495 9 | 7010 Z | 6 | ① 5,5x25 6,5x25 ⊕ PH1x25 PH2x25 ⊕ PZ1x25 PZ2x25 |

Style C 6.3 (1/4").



701 Phillips bits 25 mm, in plastic box.
Packaging: Plastic box, reusable and dust repellent.
Extra: Easily identifiable content with large symbols.

| Order-No. | Content | Quantity | |
|---------------------------------|------------|----------|------------------------|
| Wiha DuraBit | | | |
| 33855 8 | 7011 DR | 2 | ⊕ PH1x25 |
| 24267 1 | 7011 DR | 2 | ⊕ PH2x25 |
| 33856 5 | 7011 DR | 2 | ⊕ PH3x25 |
| 24269 5 | 7011 DR | 3 | ⊕ PH1x25 PH2x25 PH3x25 |
| Wiha Diamond bit | | | |
| 22107 2 | 7011 D | 2 | ⊕ PH1x25 |
| 22109 6 | 7011 D | 2 | ⊕ PH2x25 |
| 22111 9 | 7011 D | 2 | ⊕ PH3x25 |
| 22113 3 | 7011 D | 3 | ⊕ PH1x25 PH2x25 PH3x25 |
| Wiha TiN Torsions bit | | | |
| 07821 8 | 7011 TiN | 2 | ⊕ PH1x25 |
| 07828 7 | 7011 TiN | 2 | ⊕ PH2x25 |
| 07846 1 | 7011 TiN | 2 | ⊕ PH3x25 |
| 07847 8 | 7011 TiN | 3 | ⊕ PH1x25 PH2x25 PH3x25 |
| Wiha HOT Torsions bit | | | |
| 20814 1 | 7011 HOT | 2 | ⊕ PH2x25 |
| 20818 9 | 7011 HOT | 3 | ⊕ PH1x25 PH2x25 PH3x25 |
| Wiha ZOT Torsions bit | | | |
| 07876 8 | 7011 ZOT | 2 | ⊕ PH1x25 |
| 07877 5 | 7011 ZOT | 2 | ⊕ PH2x25 |
| 07878 2 | 7011 ZOT | 2 | ⊕ PH3x25 |
| 07879 9 | 7011 ZOT | 3 | ⊕ PH1x25 PH2x25 PH3x25 |
| 24752 2 | 7011 ZOT | 10 | ⊕ PH2x25 |
| Wiha Inkra bit | | | |
| 22318 2 | 7011 Inkra | 2 | ⊕ PH1x25 |
| 22320 5 | 7011 Inkra | 2 | ⊕ PH2x25 |
| 22322 9 | 7011 Inkra | 2 | ⊕ PH3x25 |
| 22649 7 | 7011 Inkra | 3 | ⊕ PH1x25 PH2x25 PH3x25 |
| Wiha stainless steel bit | | | |
| 34483 2 | 7011ST | 2 | ⊕ PH1x25 NEW |
| 34484 9 | 7011ST | 2 | ⊕ PH2x25 NEW |
| 34485 6 | 7011ST | 2 | ⊕ PH3x25 NEW |
| Wiha Standard bit | | | |
| 07855 3 | 7011 Z | 3 | ⊕ PH1x25 |
| 07856 0 | 7011 Z | 3 | ⊕ PH2x25 |
| 07857 7 | 7011 Z | 3 | ⊕ PH3x25 |
| 07858 4 | 7011 Z | 3 | ⊕ PH1x25 PH2x25 PH3x25 |
| 24733 1 | 7011 Z | 10 | ⊕ PH2x25 |

Wiha SB bit programme.

Full programme range in outstanding quality.

Style C 6.3 (1/4").



- Wiha DuraBit
- Wiha Diamond bit
- Wiha TiN Torsions bit
- Wiha HOT Torsions bit
- Wiha ZOT Torsions bit
- Wiha Inkra bit
- Wiha stainless steel bit
- Wiha Standard bit



701 Pozidriv bits 25 mm, in plastic box.
 Packaging: Plastic box, reusable and dust repellent.
 Extra: Easily identifiable content with large symbols.

| Order-No. | Content | Quantity |
|---------------------|-----------|------------------------|
| Wiha DuraBit | | |
| 33857 2 | 7012 DR 2 | ⊕ PZ1x25 |
| 24271 8 | 7012 DR 2 | ⊕ PZ2x25 |
| 33858 9 | 7012 DR 2 | ⊕ PZ3x25 |
| 24273 2 | 7012 DR 3 | ⊕ PZ1x25 PZ2x25 PZ3x25 |

| Order-No. | Content | Quantity |
|-------------------------|----------|------------------------|
| Wiha Diamond bit | | |
| 22115 7 | 7012 D 2 | ⊕ PZ1x25 |
| 22117 1 | 7012 D 2 | ⊕ PZ2x25 |
| 22119 5 | 7012 D 2 | ⊕ PZ3x25 |
| 22121 8 | 7012 D 3 | ⊕ PZ1x25 PZ2x25 PZ3x25 |

| Order-No. | Content | Quantity |
|------------------------------|------------|------------------------|
| Wiha TiN Torsions bit | | |
| 07848 5 | 7012 TiN 2 | ⊕ PZ1x25 |
| 07849 2 | 7012 TiN 2 | ⊕ PZ2x25 |
| 07850 8 | 7012 TiN 2 | ⊕ PZ3x25 |
| 07851 5 | 7012 TiN 3 | ⊕ PZ1x25 PZ2x25 PZ3x25 |

| Order-No. | Content | Quantity |
|------------------------------|------------|------------------------|
| Wiha HOT Torsions bit | | |
| 20820 2 | 7012 HOT 2 | ⊕ PZ1x25 |
| 20822 6 | 7012 HOT 2 | ⊕ PZ2x25 |
| 20824 0 | 7012 HOT 2 | ⊕ PZ3x25 |
| 20827 1 | 7012 HOT 3 | ⊕ PZ1x25 PZ2x25 PZ3x25 |

| Order-No. | Content | Quantity |
|------------------------------|------------|------------------------|
| Wiha ZOT Torsions bit | | |
| 07880 5 | 7012 ZOT 2 | ⊕ PZ1x25 |
| 07881 2 | 7012 ZOT 2 | ⊕ PZ2x25 |
| 07882 9 | 7012 ZOT 2 | ⊕ PZ3x25 |
| 07883 6 | 7012 ZOT 3 | ⊕ PZ1x25 PZ2x25 PZ3x25 |

| Order-No. | Content | Quantity |
|-----------------------|--------------|------------------------|
| Wiha Inkra bit | | |
| 22324 3 | 7012 Inkra 2 | ⊕ PZ1x25 |
| 22326 7 | 7012 Inkra 2 | ⊕ PZ2x25 |
| 22328 1 | 7012 Inkra 2 | ⊕ PZ3x25 |
| 22647 3 | 7012 Inkra 3 | ⊕ PZ1x25 PZ2x25 PZ3x25 |

| Order-No. | Content | Quantity |
|---------------------------------|----------|--------------|
| Wiha stainless steel bit | | |
| 34486 3 | 7012ST 2 | ⊕ PZ1x25 NEW |
| 34487 0 | 7012ST 2 | ⊕ PZ2x25 NEW |
| 34488 7 | 7012ST 2 | ⊕ PZ3x25 NEW |

| Order-No. | Content | Quantity |
|--------------------------|-----------|------------------------|
| Wiha Standard bit | | |
| 07859 1 | 7012 Z 3 | ⊕ PZ1x25 |
| 07860 7 | 7012 Z 3 | ⊕ PZ2x25 |
| 07861 4 | 7012 Z 3 | ⊕ PZ3x25 |
| 20542 3 | 7012 Z 1 | ⊕ PZ4x32 |
| 07862 1 | 7012 Z 3 | ⊕ PZ1x25 PZ2x25 PZ3x25 |
| 24742 3 | 7012 Z 10 | ⊕ PZ2x25 |

Style C 6.3 (1/4").



- Wiha DuraBit
- Wiha Diamond bit
- Wiha TiN Torsions bit
- Wiha stainless steel bit
- Wiha Standard bit



701 TORX® bits 25 mm, in plastic box.
 Packaging: Plastic box, reusable and dust repellent.
 Extra: Easily identifiable content with large symbols.

| Order-No. | Content | Quantity |
|---------------------|-----------|----------|
| Wiha DuraBit | | |
| 33859 6 | 7015 DR 1 | ⊕ T10x25 |
| 33860 2 | 7015 DR 1 | ⊕ T15x25 |
| 33861 9 | 7015 DR 1 | ⊕ T20x25 |
| 33862 6 | 7015 DR 1 | ⊕ T25x25 |
| 33863 3 | 7015 DR 1 | ⊕ T30x25 |
| 33864 0 | 7015 DR 1 | ⊕ T40x25 |

| Order-No. | Content | Quantity |
|-------------------------|----------|----------|
| Wiha Diamond bit | | |
| 22123 2 | 7015 D 1 | ⊕ T10x25 |
| 22125 6 | 7015 D 1 | ⊕ T15x25 |
| 22127 0 | 7015 D 1 | ⊕ T20x25 |
| 22129 4 | 7015 D 1 | ⊕ T25x25 |
| 22131 7 | 7015 D 1 | ⊕ T30x25 |
| 22133 1 | 7015 D 1 | ⊕ T40x25 |

| Order-No. | Content | Quantity |
|------------------------------|------------|--------------|
| Wiha TiN Torsions bit | | |
| 34747 5 | 7015 TiN 2 | ⊕ T10x25 NEW |
| 34748 2 | 7015 TiN 2 | ⊕ T15x25 NEW |
| 34749 9 | 7015 TiN 2 | ⊕ T20x25 NEW |
| 34750 5 | 7015 TiN 2 | ⊕ T25x25 NEW |
| 34751 2 | 7015 TiN 2 | ⊕ T30x25 NEW |
| 34752 9 | 7015 TiN 2 | ⊕ T40x25 NEW |

| Order-No. | Content | Quantity |
|---------------------------------|----------|--------------|
| Wiha stainless steel bit | | |
| 34489 4 | 7015ST 2 | ⊕ T10x25 NEW |
| 34490 0 | 7015ST 2 | ⊕ T15x25 NEW |
| 34491 7 | 7015ST 2 | ⊕ T20x25 NEW |
| 34492 4 | 7015ST 2 | ⊕ T25x25 NEW |
| 34493 1 | 7015ST 2 | ⊕ T30x25 NEW |
| 34494 8 | 7015ST 2 | ⊕ T40x25 NEW |

| Order-No. | Content | Quantity |
|--------------------------|-----------|---|
| Wiha Standard bit | | |
| 22640 4 | 7015 Z 2 | ⊕ T7x25 T8x25 |
| 22641 1 | 7015 Z 2 | ⊕ T9x25 T10x25 |
| 22643 5 | 7015 Z 2 | ⊕ T15x25 T20x25 |
| 22645 9 | 7015 Z 2 | ⊕ T25x25 T27x25 |
| 08421 9 | 7015 Z 2 | ⊕ T10x25 |
| 08422 6 | 7015 Z 2 | ⊕ T15x25 |
| 08423 3 | 7015 Z 2 | ⊕ T20x25 |
| 08424 0 | 7015 Z 2 | ⊕ T25x25 |
| 26451 2 | 7015 Z 2 | ⊕ T27x25 |
| 08425 7 | 7015 Z 2 | ⊕ T30x25 |
| 08426 4 | 7015 Z 2 | ⊕ T40x25 |
| 07870 6 | 7015 Z 3 | ⊕ T7x25 T8x25 T9x25 |
| 07871 3 | 7015 Z 3 | ⊕ T10x25 T15x25 T20x25 |
| 31913 7 | 7015 Z 3 | ⊕ T15x25 T20x25 T25x25 |
| 07872 0 | 7015 Z 3 | ⊕ T25x25 T30x25 T40x25 |
| 07873 7 | 7015 Z 6 | ⊕ T10x25 T15x25 T20x25 T25x25 T30x25 T40x25 |
| 34746 8 | 7015 Z 10 | ⊕ T15x25 NEW |
| 24746 1 | 7015 Z 10 | ⊕ T20x25 |
| 24748 5 | 7015 Z 10 | ⊕ T25x25 |
| 24750 8 | 7015 Z 10 | ⊕ T30x25 |

Style C 6.3 (1/4").

Wiha Standard bit



701 Hex bits 25 mm, in plastic box.
 Packaging: Plastic box, reusable and dust repellent.
 Extra: Easily identifiable content with large symbols.

| Order-No. | Content | Quantity |
|-----------|----------|----------------------|
| 25681 4 | 7013 Z 2 | 4,0x25 |
| 25679 1 | 7013 Z 2 | 5,0x25 |
| 07865 2 | 7013 Z 3 | 2,0x25 2,5x25 3,0x25 |
| 07866 9 | 7013 Z 3 | 4,0x25 5,0x25 6,0x25 |

Wiha Standard bit



701 Hexagon ball end bits 38 mm, in plastic box.
 Packaging: Plastic box, reusable and dust repellent.
 Extra: Easily identifiable content with large symbols.

| Order-No. | Content | Quantity |
|-----------|----------|----------------------|
| 22651 0 | 7017 Z 3 | 2,0x38 2,5x38 3,0x38 |
| 22653 4 | 7017 Z 3 | 3,0x38 4,0x38 5,0x38 |
| 22655 8 | 7017 Z 3 | 4,0x38 5,0x38 6,0x38 |

Style E 6.3 (1/4").

Wiha Standard bit



704 Slotted bits 50 mm, in plastic box.
 Packaging: Plastic box, reusable and dust repellent.
 Extra: Easily identifiable content with large symbols.

| Order-No. | Content | Quantity |
|-----------|----------|----------------------|
| 08419 6 | 7040 Z 3 | 3,0x50 3,5x50 4,0x50 |
| 08420 2 | 7040 Z 3 | 5,5x50 6,5x50 8,0x50 |

Wiha DuraBit



704 Phillips bits 50 mm, in plastic box.
 Packaging: Plastic box, reusable and dust repellent.
 Extra: Easily identifiable content with large symbols.

| Order-No. | Content | Quantity |
|-----------|------------|----------------------|
| 24727 0 | 7041 DR 2 | PH2x50 |
| 07887 4 | 7041 ZOT 3 | PH1x50 PH2x50 PH3x50 |

Wiha DuraBit



704 Pozidriv bits 50 mm, in plastic box.
 Packaging: Plastic box, reusable and dust repellent.
 Extra: Easily identifiable content with large symbols.

| Order-No. | Content | Quantity |
|-----------|------------|----------------------|
| 24738 6 | 7042 DR 2 | PZ2x50 |
| 07888 1 | 7042 ZOT 3 | PZ1x50 PZ2x50 PZ3x50 |

Wiha SB bit programme.

Full programme range in outstanding quality.

Style E 6.3 (1/4").

Wiha Standard bit




7045 TORX® bits 50 mm, in plastic box.

Packaging: Plastic box, reusable and dust repellent.
Extra: Easily identifiable content with large symbols.

| Order-No. | Content | Quantity |
|-----------|-------------------------------|----------|
| 07874 4 | 7045 Z 3 T10x50 T15x50 T20x50 | |
| 07875 1 | 7045 Z 3 T25x50 T30x50 T40x50 | |

Wiha Standard bit

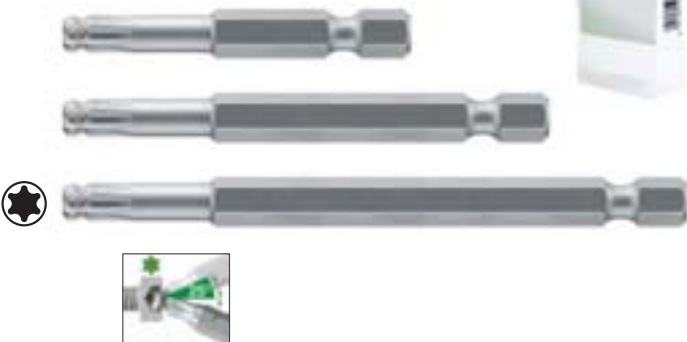

7045B TORX® ball end bits 50 mm, in plastic box.

Packaging: Plastic box, reusable and dust repellent.
Extra: Easily identifiable content with large symbols.
The TORX® ball end enables fastening and unfastening at an angle of up to 25°.
With elongated TORX® profile behind ball end.

| Order-No. | Content | Quantity |
|-----------|-------------------------------|----------|
| 32805 4 | 7045BE 1 T20x50 | |
| 32808 5 | 7045BE 1 T20x70 | |
| 32810 8 | 7045BE 1 T20x90 | |
| 32806 1 | 7045BE 1 T25x50 | |
| 32809 2 | 7045BE 1 T25x70 | |
| 33252 5 | 7045BE 1 T25x90 | |
| 32811 5 | 7045BE 1 T30x90 | |
| 32807 8 | 7045BE 3 T20x50 T25x50 T30x50 | |

Quick release holder.



NEW 7148CM CentroFix quick release holder, magnetic, style E 6.3.

Sleeve: Metal, coated.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3 and E 6.3.
Drive: DIN 3126, ISO 1173, style E 6.3.
Packaging: Plastic box, reusable and dust repellent.
Application: Whenever the bit needs a secure and zero-play hold.
Optimised for the use of drill bits.
Extra: Due to the special holding mechanism, this bit holder holds all types of bits with 1/4" hex drive.
The play between bit and holder is reduced to a minimum.
Real single-handed operation for fast bit exchange.

| Order-No. | 1/4" | 1/4" | 60 | 1 |
|-----------|------|------|----|---|
| 35386 5 | | | | |



714 ClicFix quick release holder, magnetic, style E 6.3.

Sleeve: Aluminium anodized.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
Drive: DIN 3126, ISO 1173, style E 6.3.
Packaging: Plastic box, reusable and dust repellent.
Application: For applications where the bit must be held tight e.g. assembly lines.
Extra: Real single-handed operation for fast bit exchange.

| Order-No. | 1/4" | 1/4" | 60 | 1 |
|-----------|------|------|----|---|
| 24778 2 | | | | |

Universal holder.



7113 Universal holder, magnetic, style E 6.3.

Sleeve: Stainless steel.
Suitable for: For bits according to DIN 3126, ISO 1173 style C 6.3.
Drive: DIN 3126, ISO 1173, style E 6.3.
Packaging: Plastic box, reusable and dust repellent.
Extra: Easily identifiable content with large symbols.

| Order-No. | 1/4" | 1/4" | 58 | 1 |
|-----------|------|------|----|---|
| 07869 0 | | | | |

Tool shaft.



7240 Tool shaft, style E 6.3.

Standards: Adapter DIN 7428.
Suitable for: DIN 3121, ISO 1174, style F 6.3.
Drive: DIN 3126, ISO 1173, style E 6.3.
Application: For machine used nut driver sockets.
Packaging: Plastic box, reusable and dust repellent.
Extra: Easily identifiable content with large symbols.

| Order-No. | 1/4" | 1/4" | 50 | 1 |
|-----------|------|------|----|---|
| 08427 1 | | | | |